

Gigaset

C610

Congratulations

By purchasing a Gigaset, you have chosen a brand that is fully committed to sustainability. This product's packaging is eco-friendly!

To learn more, visit www.gigaset.com.



GIGASET. INSPIRING CONVERSATION.
MADE IN GERMANY

The handset at a glance



- 1 **Display** in idle status
- 2 **Battery charge status** (→ page 17)
- 3 **Display keys** (→ page 20)
- 4 **Message key** (→ page 38)
Access to calls and message lists;
Flashes: new message or new call
- 5 **End call key, On/Off key**
End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
- 6 **Hash key**
Keypad lock on/off (press and hold in idle status);
toggles between upper/lower case and digits
- 7 **Mute key** (→ page 30)
Mute the microphone
- 8 **Microphone**
- 9 **Recall key**
- Consultation call (flash)
- Insert a dialling pause (press and hold)
- 10 **Star key**
Ringtone on/off (press and hold);
with an open connection: switch between dial pulsing/tone dialling (press briefly);
Text input: Open table of special characters
- 11 **Connection socket for headset** (→ page 17)
- 12 **Key 1**
Dial network mailbox (press and hold)
- 13 **Talk key**
Flashes: incoming call;
Accept a call; open redial list (press briefly);
start dialling (press and hold);
When writing an SMS: send SMS
- 14 **Handsfree key**
Switch between earpiece and handsfree mode
- 15 **Control key** (→ page 19)
- 16 **Signal strength** (→ page 17)
Green: Eco Mode activated (→ page 52)

Base



Registration/
Paging key
(→ page 54)

Display symbols

The following symbols are displayed dependent on the settings and the operating status of your telephone:

Signal strength (→ page 52)
or ECO Mode+ (→ page 52)

Ringtone switched off (→ page 61)

Battery charging (→ page 17)

Battery charge status (→ page 17)

Alarm switched on and wake-up time (→ page 53)

Current time (→ page 17)

Current day and month (→ page 17)

Name of the handset (→ page 56)

Number of new messages:

- ◆ on the network mailbox (→ page 38)
- ◆ in the list of missed calls (→ page 38)
- ◆ in the SMS list (→ page 44)
- ◆ in the list of missed appointments (→ page 40)

Signalling

External call (→ page 28)



Alarm clock (→ page 53)



Internal call (→ page 54)



Anniversary (→ page 37)



Contents

The handset at a glance	1
Display symbols	2
Safety precautions	6
Gigaset C610 – more than just a telephone	7
First steps	8
Checking the pack contents	8
Setting up the base and charging cradle (if included)	9
Connecting the base	9
Connecting the charging cradle (if included)	10
Setting up the handset for use	11
Changing the display language	14
Setting the date and time	15
Connecting the headset	17
What would you like to do next?	18
Using the phone	19
Control key	19
Display keys	20
Keys on the keypad	20
Correcting incorrect entries	20
Menu guidance	21
Activating/deactivating the handset	22
Activating/deactivating the keypad lock	22
Illustration of operating steps in the user guide	23
Menu overview	25
Making calls	28
Making an external call	28
One Touch Call	28
Ending a call	28
Accepting a call	28
Calling Line Identification	29
Notes on calling line display (CLIP)	29
Handsfree mode	30
Switching to mute	30
Making calls using network services	31
Call waiting during an external call	31
Call divert (CD)	31
Consultation call, call swap, conference	32
Further functions	33

- Using the directory and lists 34**
- Directory 34
- Redial list 37
- Incoming SMS message list 37
- Call lists 38
- Message key function 38
- List of missed appointments 40
- Making cost-effective calls 40**
- Automatic network provider code (preselection) 40
- SMS (text messages) 42**
- Writing/sending an SMS 42
- Receiving an SMS 44
- SMS with vCard 46
- Notification by SMS 46
- SMS mailboxes 47
- Setting SMS centres 48
- SMS info services 49
- SMS on a PABX 49
- Activating/deactivating first ringtone muting 49
- Activating/deactivating SMS function 50
- SMS troubleshooting 50
- Using the network mailbox 51**
- Configuring fast access for the network mailbox 51
- Viewing the network mailbox message 51
- ECO DECT 52**
- Setting the alarm clock 53**
- Using several handsets 53**
- Registering handsets 53
- De-registering handsets 54
- Locating a handset ("Paging") 54
- Changing the base 54
- Making internal calls 54
- Listening in to an external call 56
- Changing the name of a handset 56
- Changing a handset's internal number 56
- Using a handset as a room monitor (Babyphone) 57**

Handset settings	58
Quick access to numbers and functions	58
Changing the display language	59
Setting the display	59
Activating/deactivating auto answer	60
Changing the speaker/earpiece volume	60
Changing ringtones	61
Activating/deactivating advisory tones	62
Setting your own area code	62
Restoring the handset default settings	63
Base settings	63
Activating/deactivating music on hold	63
Repeater support	63
Protecting against unauthorised access	63
Restoring the base to the factory settings	64
Connecting the base to the PABX	65
Dialling modes and recall	65
Saving an access code (outside line code)	65
Setting pauses	66
Temporarily switching to tone dialling (DTMF)	66
Customer Service & Assistance	67
Questions and answers	68
Authorisation	69
Guarantee Certificate	69
Environment	70
Appendix	71
Care	71
Contact with liquid	71
Specifications	71
Writing and editing text	72
Accessories	74
Mounting the base on the wall	77
Mounting the charging cradle on the wall	77
Index	78

Safety precautions

Warning

Read the safety precautions and the user guide before use.

Explain their content and the potential hazards associated with using the telephone to your children.



Only use the mains adapter supplied, as indicated on the underside of the base.



Only use the **recommended, rechargeable batteries** (→ page 71) as this could otherwise result in significant health risks and personal injury.



Using your telephone may affect nearby medical equipment. Be aware of the technical conditions in your particular environment e.g., doctor's surgery.

If you use a medical device (e.g. a pacemaker), please contact the device manufacturer. They will be able to advise you regarding the susceptibility of the device to external sources of high-frequency energy. Please refer to the "Appendix" chapter for the specifications of this Gigaset product.



Do not hold the rear of the handset to your ear when it is ringing or when handsfree mode is activated. Otherwise you risk serious and permanent damage to your hearing.

Your Gigaset is compatible with the majority of digital hearing aids on the market. However, perfect function with all hearing aids cannot be guaranteed.

The handset may cause an unpleasant humming or whistling noise in hearing aids or cause them to overload. If you require assistance, please contact the hearing aid supplier.



Do not install the base or charging cradle in bathrooms or shower rooms. The base and charging cradle are not splashproof (→ page 71).



Do not use your phone in environments with a potential explosion hazard (e.g. paint shops).



If you give your Gigaset to someone else, make sure you also give them the user guide.



Please remove faulty bases from use or have them repaired by our Service department, as they could interfere with other wireless services.

Please note

- ◆ Not all of the functions described in this user guide are available in all countries.
- ◆ The device cannot be used in the event of a power failure. It is also **not** possible to transmit **emergency calls**.



Gigaset C610 – more than just a telephone

Your telephone sets new standards for the way you communicate at home.

The large TFT display, user-friendly keypad and clearly laid out menu are very simple to use.

It can do a whole lot more:

- ◆ Store anniversaries such as birthdays in your phone and it will remind you of them in advance.
- ◆ Allocate important people to one of six VIP groups so you can identify important calls from the ringtone and the colour of the allocated VIP group.
- ◆ If you only want to accept calls when you can see the number, you can set your phone to only ring when the phone number is transferred.
- ◆ You can assign important numbers to the number keys on your handset. The number is then dialled by simply pressing the key.
- ◆ Set the display to show in large print to increase readability during certain important situations (e.g. in the directory and in lists).

Set the menu display to suit your individual requirements so that only the most important functions (**standard mode**) or all functions are displayed (**expert mode** ). Menu options that are only available in expert mode are marked with the  icon.

- ◆ Gigaset Green Home – be environmentally aware when using your phone. For more information, see www.gigaset.com/service.

You can find additional information about your telephone at www.gigaset.com/gigasetc610.

Have fun using your new phone!

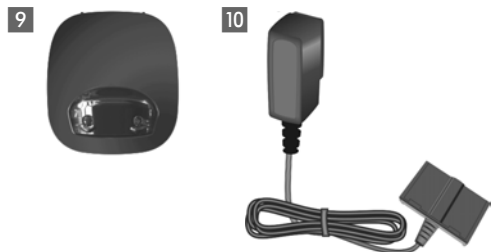
First steps

Checking the pack contents



- 1 one Gigaset C610 base
- 2 one mains adapter
- 3 one Gigaset C610H handset
- 4 one phone cord
- 5 two batteries
- 6 one battery cover
- 7 one belt clip
- 8 one user guide

If you have purchased a **model with multiple handsets** the package should contain two batteries, a battery cover, a belt clip and a charging cradle **9** with mains adapter **10** for each additional handset.



Setting up the base and charging cradle (if included)

The base and charging cradle are designed for use in enclosed dry rooms with a temperature range of +5°C to +45°C.

- ▶ Install the base on a level, non-slip surface in a central location in your house or flat or mount the base or charging cradle on the wall → page 77.

Please note

Pay attention to the range of the base.

This is up to 300 m in unobstructed outdoor areas and up to 50 m inside buildings. The range is reduced when Eco Mode (→ page 52) is activated.

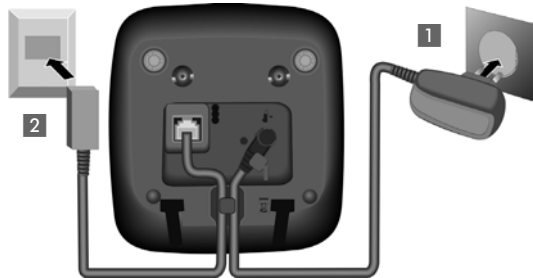
The phone's feet do not usually leave any marks on surfaces. However, due to the multitude of different varnishes and polishes used on today's furnishings, the occurrence of marks on the surfaces cannot be completely ruled out.

Please note:

- ◆ Never expose the telephone to the influence of heat sources, direct sunlight or other electrical devices.
- ◆ Protect your Gigaset from moisture, dust, corrosive liquids and vapours.

Connecting the base

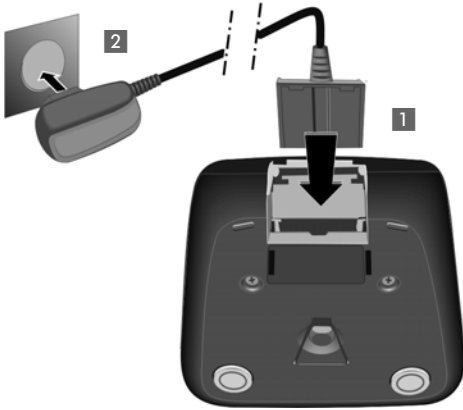
- ▶ **First** connect the telephone jack **2** and insert the cables into the cable ducts.
- ▶ **Then** connect the mains adapter **1**.



Please note:

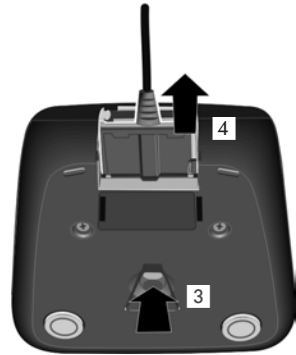
- ◆ The mains adapter must **always be connected**, as the phone will not operate without a mains connection.
- ◆ Only use the mains adapter and phone cord **supplied**. Pin connections on telephone cables can vary (pin connections → page 72).

Connecting the charging cradle (if included)



- ▶ Connect the flat plug from the mains adapter **1**.
- ▶ Plug the mains adapter into the plug socket **2**.

If you need to disconnect the plug from the charging cradle, press the release button **3** and disconnect the plug **4**.



Setting up the handset for use

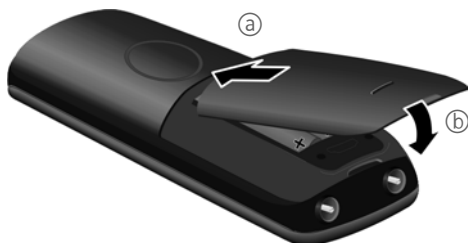
The display is protected by a plastic film.
Please remove the protective film!

Inserting the batteries and closing the battery cover

Warning

Only use the rechargeable batteries (→ page 71) recommended by Gigaset Communications GmbH, i.e. never use conventional (non-rechargeable) batteries, as this could result in significant health risks and personal injury. For example, the outer casing of the batteries could be damaged or the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

- ▶ Insert the batteries the right way round. The polarity is indicated in/on the battery compartment.



- ▶ First insert the battery cover at the top (a).
- ▶ Then press the cover (b) until it clicks into place.

If you need to open the battery cover, for instance to replace the batteries, place your fingertip in the cavity on the casing and pull the battery cover upwards.



Attaching the belt clip

The handset has notches on each side to attach the belt clip.

- ▶ **To attach** – press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.
- ▶ **To remove** – using your right thumb apply pressure to the centre of the belt clip, push the fingernail of your left index finger between the clip and the casing and lift the clip upwards.



Initial charging and discharging of the batteries

The correct charge status can only be displayed if the batteries are first fully charged **and** discharged.

- ▶ Charge the handset in the base for **10 hours**.



Please note

The handset must only be placed in the designated Gigaset C610 base or charging cradle.

- ▶ After charging, remove the handset from the base and only replace it when the batteries are **fully discharged**.

Please note


- ◆ Each handset is registered with the base at the factory. You do not need to register the handset again. If you wish to use your handset with a different base or use further handsets with your base, you have to register the handset manually → page 53.
- ◆ After the first battery charge **and** discharge, you may place your handset in the base after every call.
- ◆ Always repeat the charging and discharging procedure if you remove the batteries from the handset and reinsert them.
- ◆ The batteries may warm up during charging. This is not dangerous.
- ◆ After a while, the charge capacity of the batteries will decrease for technical reasons.

Changing the display language

Change the display language, if you do not understand the language currently set.



▶ Press right on the control key.




▶ Press the keys **6 MNO** and **5 JKL** slowly one after the other.



The display for setting languages appears. The current language (e.g. English) is selected.




▶ Press down on the control key  ...




... until the language you wish to use is marked, e.g. French.

▶ Press the **right** key directly below the display to select this language.



The selection is marked with .

▶ Press and **hold** the end call key  to return to idle status.

Setting the date and time

Set the date and time so that the correct date and time can be assigned to incoming calls, and so that the alarm can be used.



- ▶ Press the key below **Time** on the screen display to open the input field.
(If you have already set the time and date, open the input field via the menu → page 27.)



The **Date/Time** submenu is shown on the display.

- ▶ The active input position flashes.
Enter day, month and year as an 8-digit number via the keypad, e.g.

1	00
---	----

4	GHI
---	-----

1	00
---	----

0	+
---	---

2	ABC
---	-----

0	+
---	---

1	00
---	----

1	00
---	----

 for 14/10/2011.



Press the **right** or **left** control key to change the input position and correct an entry.



- ▶ Press **down** on the control key to switch to the time input field.

- ▶ Enter the hours and minutes as four digit numbers via the keypad, e.g.

0	+
---	---

7	PQRS
---	------

1	00
---	----

5	JKL
---	-----


 for 07:15 am.
Change the input position with the control key if necessary.



First steps



- ▶ Press the key below **Save** on the display screen to confirm your entry.








The display shows **Saved**. You will hear a confirmation tone and the handset will automatically return to idle status.

Display in idle status

Once the phone is registered and the time set, the idle display is shown as in this example.










Displays


- ◆ Reception signal between the base and handset:

- good to poor:    
- no reception: 

Green: Eco Mode activated (→ page 52)

- ◆ Battery charge status:

-  white: charged over 66%
-  white: charged between 34% and 66%
-  white: charged between 11% and 33%
-  red: charged below 11%
-  flashes red: battery almost empty (less than 10-minutes talktime)
-     white: battery charging




Please note

Have you chosen a color scheme with white background, the white symbols are displayed in black.

- ◆ INT 1

Internal name of the handset (→ page 56)

If **Eco Mode+** (→ page 52) is activated, the  icon is displayed in the top left.

Your phone is now ready for use!

Connecting the headset










You can connect a headset with a 2.5 mm jack connector. See the relevant product page at www.gigaset.com for information on recommended headsets.

What would you like to do next?

Now you have successfully started your Gigaset, you will probably want to adapt it to your personal requirements. Use the following guide to quickly locate the most important subjects.



If you are unfamiliar with menu-driven devices such as other Gigaset telephones you should first read the section entitled "Using the phone" → page 19.

Information on is located here.
Setting the ringtone and volume	 page 61
Setting the earpiece volume	 page 60
Setting Eco Mode / Eco Mode+	 page 52
Preparing the telephone for SMS reception	 page 42
Operating the telephone on a PABX	 page 65
Registering existing Gigaset handsets to a base	 page 53
Transferring directory entries from existing Gigaset handsets to new handset(s)	 page 36

If you have any questions about using your phone, please read the tips on troubleshooting (→ page 68) or contact our Customer Care team (→ page 67).

Using the phone





Control key

Below, the side of the control key that you must press in the respective operating situation is marked in black (top, bottom, right, left, centre), e.g.  for "press right on the control key" or  for "press the centre of the control key".





The control key has a number of different functions:





When the handset is in idle status

-  Open the directory.
-  Open the main menu.
-  Open the list of handsets.
-  Call up the menu to set the call volume (→ page 60) of the handset.







In the main menu

- , ,  or 
- Navigate to the required function.




In submenus and lists

-  /  Scroll up/down line by line.

In input fields

Use the control key to move the cursor up , down , right  or left . Press and hold  or  to move the cursor **word by word**.

During an external call

-  Open the directory.
-  Initiate an internal consultation call.
-  Adjust the loudspeaker volume for earpiece and handsfree mode.

Functions when pressing the middle of the control key

Depending on the operating situation, the key has different functions.

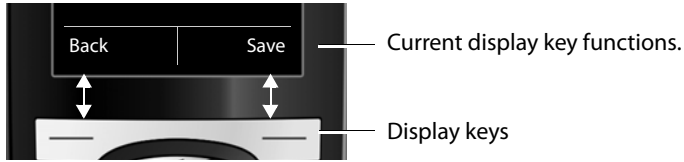
- ◆ **In idle status** the key opens the main menu.
- ◆ **In submenus, selection and input fields** the key takes on the function of the display keys **OK**, **Yes**, **Save**, **Select** or **Change**.

Please note

In these instructions, opening the main menu is represented by pressing right on the control key and functions are confirmed by pressing the corresponding display key. However, if you prefer, you can use the control key as described above.

Display keys

The functions of the display keys change depending on the particular operating situation. Example:




Some important display keys:

Options	Open a context-dependent menu.
OK	Confirm selection.
< C	Delete key: delete one character/word at a time from right to left.
Back	Go back one menu level or cancel operation.
Save	Store entry.
→→	Open the redial list.


Keys on the keypad

 /  /  etc.
Press the matching key on the handset.


Enter digits or letters.


Correcting incorrect entries


You can correct incorrect characters in the input fields by navigating to the incorrect entry using the control key. You can then:

- ◆ Delete the **character** by briefly pressing  or press and **hold** to delete the **word** to the left of the cursor.
- ◆ Insert characters next to the cursor.
- ◆ Overwrite the highlighted (flashing) character, e.g. when entering time and date.

Menu guidance


Your telephone's functions are accessed using a menu that has a number of levels.

The menu display can be extended (**Expert mode** ) or reduced (**Standard mode**). Expert mode is activated by default.

Settings or functions that are only available in expert mode are marked in these instructions with the  icon.


Switching between standard/expert mode and the menu overview → page 25.

Main menu (first menu level)


- ▶ When the handset is in idle status press the **right**  control key to open the main menu.

The main menu functions are shown in the display with icons. The icon for the selected function is marked in orange and the name of the associated function appears in the display's header.

To access a function, i.e. to open the corresponding sub-menu (next menu level):

- ▶ Use the control key  to select the required function and press the display key **OK**.


Briefly press the display key **Back** or the end call key  to revert back to idle status.





Submenus

The functions in the submenus are displayed as lists (example on the right).

To access a function:

- ▶ Scroll to the function with the control key  and press **OK**.

Briefly press the display key **Back** or the end call key  to return to the previous menu level/cancel the operation.



Reverting to idle status

You can revert to idle status from anywhere in the menu as follows:

- ▶ Press and **hold** the end call key .

Or:

- ▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.

Settings that have not been saved by selecting the display key **OK**, **Yes**, **Save** or **Change** will be lost

An example of the display in idle status is shown on page 17.

Activating/deactivating the handset



With the phone in idle status, press and **hold** the end call key (confirmation tone) to switch off the handset.

Press and **hold** the end call key again to switch the handset on.

Please note

When the handset is switched on, an animation of the **Gigaset** logo will be displayed for several seconds.

Activating/deactivating the keypad lock

The keypad lock prevents any inadvertent use of the phone.



Press and **hold** the hash key in idle status to activate or deactivate the keypad lock. You will hear the confirmation tone.

If the keypad lock is activated a warning will be shown when you press a key.

The keypad lock deactivates automatically when you receive a call. It is reactivated when the call is ended.

Please note



When the keypad lock is active, you cannot call emergency numbers.

Illustration of operating steps in the user guide

The operating steps are shown in abbreviated form.


Example:

The illustration:


 →  → Eco Mode → Eco Mode+ (☑ = on)

means:

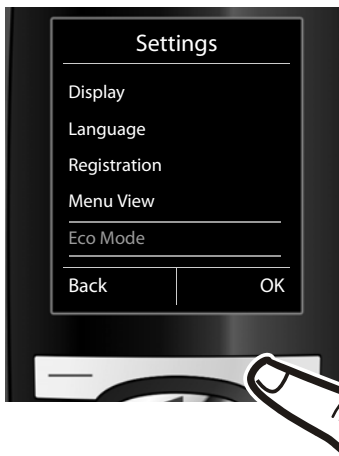



- ▶ Press **right** on the control key  to open the main menu.



- ▶ Use the right, left, down and up control key  to navigate to the **Settings** submenu.


- ▶ Press the display key **OK** to confirm your selection.



- ▶ Press **down** on the control key  until the **Eco Mode** menu appears on the display.

- ▶ Press the display key **OK** to confirm your selection.




- ▶ Press down on the control key  until the **Eco Mode+** menu appears on the display.

- ▶ Press the display key **Change** to activate/deactivate the function.





Changes are effective immediately and do not have to be confirmed.




- ▶ Press the key below **Back** on the display to jump back to the previous menu level.
or
Press and **hold** the end call key  to return to idle status.


Menu overview

Setting standard or expert mode

The menu display can be extended (**Expert mode** ) or reduced (**Standard mode**). Menu options that are only available in expert mode are marked with the  icon.

The settings are carried out as follows:

Select  →  → **Menu View** → **Simplified** (standard mode) or **Complete** (expert mode) → **Select** (the active mode is marked with )



Open the main menu: When the telephone is in idle status press .

SMS

You have activated an SMS mailbox (general or private) without a PIN

New SMS	→ page 42
Incoming	→ page 45
Draft	→ page 43

You have activated an SMS mailbox with a PIN or 2-3 mailboxes


Mailbox	New SMS	→ page 42
	Incoming	→ page 45
	Draft	→ page 43
Mailbox 1 Mailbox 2 Mailbox 3	New SMS	→ page 42
	Incoming	→ page 45
	Draft	→ page 43
 SMS Service		→ page 49
 Settings	Service Centres	→ page 48
	SMS Mailboxes	→ page 47
	Notification	→ page 46
	Status Report	→ page 43

Menu overview

Call Lists

All Calls	→ page 38
Outgoing Calls	→ page 38
Accepted Calls	→ page 38
Missed Calls	→ page 38

Voice Mail

Play Messages	Network Mailbox	→ page 51
 Network Mailbox		→ page 51






Select Services

Network Mailbox	→ page 33	
All Calls	Call Divert	→ page 31
	Call Waiting	→ page 31
	Fixed Destin. Call	→ page 33

Additional Features

Alarm Clock	→ page 53
Room Monitor	→ page 57
One Touch Call	→ page 28

 **Settings**

Date/Time	→ page 15
Audio Settings	Handset Volume → page 60
	 Advisory Tones → page 62
	Ringtones(Handset) → page 61
	 Music on hold → page 63
Display	Screensaver → page 59
	Large Font → page 60
	Colour Schemes → page 60
	 Backlight → page 60
Language	→ page 59
Registration	Register Handset → page 53
	De-reg. Handset → page 54
	Select Base → page 54
 Telephony	Auto Answer → page 60
	Area Codes → page 62
	Listening In → page 56
	Preselection → page 41
	Access Code → page 65
	Dialling Mode → page 65
	Recall → page 65
 System	Handset Reset → page 63
	Base Reset → page 64
	Repeater Mode → page 63
	System PIN → page 63
Menu View	Simplified → page 25
	Complete → page 25
Eco Mode	Eco Mode → page 52
	Eco Mode+ → page 52

Making calls

If the backlight is deactivated (→ page 60) it is switched on by pressing any key. **Digit keys** appear on the display for pre-dialling; **all other keys** do not have any further functions.

Making an external call

External calls are calls using the public telephone network.




Enter the number and press the talk key.

Or:



Press and **hold** the talk key and then enter the number.

You can cancel the dialling operation with the end call key .

You are shown the duration of the call while the call is in progress.

Please note

Dialling with the directory (→ page 34), calls list (→ page 38) and redial list (→ page 37) saves you from repeatedly keying in phone numbers.

One Touch Call

You can set up your phone that by pressing **any** key a previously stored number is dialled. This allows for example children, who can not enter a number, to call a certain number.

 →  → **One Touch Call**

▶ Change multiple line input:

Activation:


Select **On** to activate.


Call to:

Enter or change number.


▶ Press **Save** to save the settings.

When the function is activated, the idle display looks as shown below:



By pressing any key the saved number is dialled. Press the end call key , to cancel the dialling operation or to end the call.

Deactivating the One Touch Call


- ▶ In **idle status**, press the display key **OFF**.
- ▶ Press and **hold** the hash key , to deactivate the One Touch Call.

Ending a call





Press the end call key.

Accepting a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing talk key .

You can accept the call by:

- ▶ Pressing the talk key .
- ▶ Pressing the handsfree key .
- ▶ Press the display key **Accept**.

If the handset is in the base/charging cradle and the **Auto Answer** function is activated (→ page 60), the handset automatically answers the call when you remove it from the charging cradle.




To deactivate the ringtone, press the **Silence** display key. You can accept the call as long as it is displayed on the screen.


Calling Line Identification




When you receive a call, the caller's number and/or name is displayed on the screen if the following conditions are met:

- ◆ Your network provider supports CLIP, CLI and CNIP.
 - CLI (Calling Line Identification): the caller's number is transmitted.
 - CLIP (Calling Line Identification Presentation): the caller's number is displayed.
 - CNIP (Calling Name Identification Presentation): the caller's name is displayed.
- ◆ You have requested CLIP or CNIP from your network provider.
- ◆ The caller has requested CLI from the network provider.

Call display with CLIP/CLI

If the caller's number is saved in your directory, the number is replaced by the corresponding directory entry (Symbol  /  /  and name/number).



- 1 Ringtone icon (background colour changes if VIP group is assigned → page 36)
- 2 Symbol  /  /  from directory
- 3 Number or name of caller

The following is displayed in place of the number:

- ◆ **External**, if no number is transmitted.
- ◆ **Unavailable**, if the caller has not requested Calling Line Identification.

Display with CNIP

If you have CNIP, then the name (town/city) that is registered with your network provider for the caller's number will **also** be displayed. If the number of the caller is stored in your directory, the CNIP display is replaced by the corresponding directory entry.



- 1 Caller's number
- 2 Name and town/city

The display shows:

- ◆ **External**, if no number is transmitted.
- ◆ **Unavailable**, if the caller has not requested Calling Line Identification.

Notes on calling line display (CLIP)

By default, the number of the caller is shown in the display of your Gigaset telephone. You do not have to make any other settings on your Gigaset telephone.

Making calls

However, if the caller's number is not displayed, this can be due to the following:

- ◆ You have not ordered CLIP from your network provider or
- ◆ Your telephone is connected via a PABX or a router with an integrated PABX (gateway) that does not transmit all information.

Is your telephone connected via a PABX/gateway?

You can establish this by checking for an additional device connected between your telephone and house connection, e.g., a PABX, gateway etc. In most cases, simply resetting this device will remedy the situation:

- ▶ Briefly disconnect the mains plug of your PABX. Re-insert the plug and wait for the device to restart.

If the caller number is still not displayed:

- ▶ Check the CLIP settings of your PABX and activate this function if necessary. In the user guide for the device, search for the term "CLIP" (or an alternative term such as "calling line identification", "phone number transmission", "caller ID", ...). If necessary, contact the device manufacturer.

If this does not resolve the problem, it is possible that your network provider does not the CLIP service for this number.

Have you ordered the calling line display service from your network provider?

- ▶ Check whether your provider supports calling line display (CLIP) and that the function has been activated for you. If necessary, contact your provider.

Additional information on this subject can be found on the Gigaset homepage at:

www.gigaset.com/service

Handsfree mode

In handsfree mode, instead of holding the handset to your ear you can put it down, for example on the table in front of you. This allows others to participate in the call.

Activating/deactivating handsfree mode

Activating while dialling



Enter the number and press the handsfree key.

- ▶ You should inform your caller before you use the speaker function so that they know someone else is listening.


Switching between earpiece and handsfree mode



Press the handsfree key.

During a call, activate or deactivate handsfree mode.

If you wish to place the handset in the base/charging cradle during a call:

- ▶ Press and hold the handsfree key  while placing the handset in the base.

For instructions on how to adjust the loudspeaker volume, → page 60.

Switching to mute



You can deactivate the microphone in your handset during an external call.



Press key to mute the handset. The display shows **Microphone is off**.

Press the key again to reactivate the microphone.

Please note

If the telephone is muted, all keys except the mute key  and the end-call key  will not work.

Making calls using network services

Network services are functions that your network provider makes available to you. You have to request these services from your network provider.

- ▶ **It is not possible to reprogram the network services.**
- ▶ **If you require assistance, please contact your network provider.**

Call waiting during an external call

If the function is activated during an **external** call you will hear a call waiting tone to signal that another external caller is trying to get through. If you have CLIP (→ page 29) the number of the waiting caller or the corresponding directory entry is shown in the display.

Activating/deactivating call waiting

 →  → **All Calls** → **Call Waiting**

Status Activate/deactivate.

Send Press the display key.

Accepting a waiting call

You are making an external call and hear the call waiting tone.

You have the following options:

Options → **Accept Waiting call**

or

(only if CLIP is activated → page 29)

Accept Press the display key.

Once you have accepted the waiting call you can switch between the two callers ("call swap" → page 32) or speak to both at the same time ("conference" → page 32).

Rejecting a waiting call

You can hear the call waiting tone but do not want to speak to the caller.

Options → **Reject Waiting call**

The caller hears the busy tone.

Call divert (CD)

When diverting a call, the call is forwarded to another connection.

The following options are available:

- ◆ **All Calls:** Calls are diverted immediately. No more calls are signalled on your phone.
- ◆ **No Answer:** Calls are diverted if no one accepts the call within several rings.
- ◆ **When Busy:** Calls are diverted when your line is busy. Call is diverted without a call waiting tone.

 →  → **All Calls** → **Call Divert**

- ▶ Change multiple line input:

When:

Select **All Calls** / **When Busy** / **No Answer**.


Phone Number:

Enter the number to which the call is to be diverted.

Status:

Activate/deactivate call divert.

Send Press the display key.

 After the announcement, press the end call key.

Consultation call, call swap, conference

These functions enable you to

- ◆ Call a second external caller (consultation call)
- ◆ Switch between two calls (call swap)
- ◆ Talk to two callers at the same time (conference)

Consultation call

You can call a second external caller. The first call is placed on hold.

During an external call:

Ext. Call Press the display key.
The previous call is placed on hold. The other participant hears an announcement.



Enter the second participant's telephone number.

The phone number is dialled. You are connected to the second participant.

If the caller does not answer, select the display key **End** to return to the first participant.

Please note

You can also select the second participant's phone number from the directory (→ page 35) or the calls list (→ page 38).

Ending a consultation call

Options → **End Active Call**


You are reconnected to the first caller.

You can also end the consultation call by selecting the end call key. The connection is briefly interrupted and you will be called back. Once you have pressed the talk key you are reconnected to the first caller.

Call swapping

You can speak to both callers one at a time (call swap).

Precondition: You are conducting an external call and have called a second participant (consultation call) or have accepted a waiting call.

- ▶ Use  to swap between the participants.

The caller you are currently speaking to is marked with the  icon.

End the current call

Options → **End Active Call**


You are re-connected to the waiting caller.

Conference


You can speak to both participants simultaneously.

Precondition: You are conducting an external call and have called a second participant (consultation call) or have accepted a waiting call.

Conf. Press the display key.

You and the two other callers (both marked by the ) can hear and speak to each other simultaneously.

Ending a conference call

 Press the end call key to end the call with both participants.

Or:

EndConf Press the display key.


You return to the "call swap" status. You are reconnected to the caller with whom you started the conference call.



You can continue your conversation with the other callers.

Each of the callers can end their participation in the conference call by selecting the end call key and replacing the handset.

Further functions

Connecting without dialling

If you remove the telephone from the base/charging cradle or press the talk key  the stored number is automatically dialled after five seconds without having to press a button.

 →  → All Calls → Fixed Destin.
Call

► Change multiple line input:

Phone Number:

Enter the telephone number.

Status:

Activate/deactivate function.

Send Press the display key.

Activating/deactivating the network mailbox

The network mailbox can be activated and deactivated.

 →  → Network Mailbox

Status: Activate/deactivate.

Send Press the display key.

Using the directory and lists

The options are:

- ◆ Directory
- ◆ Redial list
- ◆ Incoming SMS message list
- ◆ Call lists
- ◆ List of missed appointments

You can create a personalised directory for your own individual handset. You can also send lists/entries to other handsets (→ page 36).

Directory

You can save up to 150 entries in the directory.


Please note

For quick access to a number from the directory (shortcut), you can assign the number to a key (→ page 58).

Directory

In the **directory**, you can save

- ◆ Up to three numbers and associated first names and surnames
- ◆ E-mail address
- ◆ Anniversaries with reminder
- ◆ VIP ringtones with VIP symbol.

You open the directory in idle status using the  key.

Length of the entries

3 numbers:

each max. 32 digits

First name and surname:

each max. 16 characters

E-mail address:

max. 64 characters

Saving a number in the directory

 → <New Entry>

▶ Change multiple line input:

First Name: / Surname:

Enter first names and/or surnames.

If a name is not entered in any of the fields, the telephone number is saved and displayed as the surname.




(For instructions on how to enter text and special characters, please see

→ page 72.)

Phone (Home): / Phone (Office): /

Phone (Mobile):

Enter a number in at least one of the fields.

When scrolling through the directory, the entries are highlighted by a prefixed symbol:  /  / .

E-mail:

Enter the e-mail address.

Anniversary:

Select **On** or **Off**.


When set to **On**:

Enter **Annivers. (Date)** and **Anniversary (time)** and select reminder type:

Anniversary (tone) → page 36.

VIP Group:

Mark directory entry as **VIP** (Very Important Person).

Each entry can be allocated to one of 6 VIP groups, which are defined by the colour of the  symbol, the name of the VIP group and the corresponding ringtone.

VIP calls are recognised by the ringtone. The background colour of the ringtone animation changes to the colour of the VIP group.

Precondition: Calling Line Identification (→ page 29).

 **Save**

Press the display key.

Order of directory entries

Directory entries are generally sorted alphabetically by surname. Spaces and digits take first priority. If only the first name was entered in the directory, this is incorporated into the sort order instead of the surname.

The sort order is as follows:



1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get round the alphabetical order of the entries, insert a space or a digit in front of the first letter of the surname. These entries will then move to the beginning of the directory.



Selecting a directory entry



 Open the directory.

You have the following options:

- ◆ Use  to scroll through the entries until the required name is selected.
- ◆ Enter the first letters of the name; if necessary scroll to the entry with the  key. The directory searches for the surname. If a surname has not been entered, the directory searches for the first name.



Dialling with the directory

 →  (Select entry).

 Press the talk key.
(If several numbers have been entered, select the required number and press talk key  again).
The number is dialled.


Managing directory entries

Viewing entries


 →  (Select entry).

View Press the display key. The entry is displayed.

Options Press the display key.

The following functions can be selected with :

Display Number

To edit or add to a saved number, or to save it as a new entry, press  after the number is displayed.

Delete Entry



Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 36).

vCard via SMS: Send a single entry in vCard format via SMS.



Editing entries


 →  (Select entry).

View Edit Press the display keys one after the other.



▶ Carry out changes and save.

Using other functions

 →  (Select entry) → **Options** (Open menu)

The following functions can be selected with :

Display Number

Edit or add to a saved number and then dial with  or save as a new entry; to do this, press  after the number appears on the display.

Edit Entry

Edit selected entry.

Delete Entry

Delete selected entry.

Using the directory and lists

Copy Entry

to Internal: Send a single entry to a handset (→ page 36).

vCard via SMS: Send a single entry in vCard format via SMS.

VIP Groups

Change the name and ringtone of VIP groups; to do this:

- **Edit**
- Change entry → **Save**.

Delete All

Delete **all** entries in the directory.

Copy All

to Internal: Send the complete list to a handset (→ page 36).

Available Memory

Display the number of entries that are still available in the directory (→ page 34).



Using shortcut keys


- ▶ Press and **hold** the required shortcut key (→ page 58).

Sending the directory to another handset

Preconditions:

- ◆ The sending and receiving handsets must both be registered to the same base.
- ◆ The other handset and the base can send and receive directory entries.

 →  (Select entry) → **Options** (Open menu) → **Copy Entry / Copy All** → **to Internal**

 Select the internal number of the receiving handset and press **OK**.

You can transfer several individual entries one after the other by responding to the **Entry copied - Copy next entry?** prompt with **Yes**.

A successful transfer is confirmed by a message and confirmation tone on the receiving handset.

Please note:

- ◆ Entries with identical numbers are not overwritten on the receiving handset.
- ◆ The transfer is cancelled if the phone rings or if the memory of the receiving handset is full.
- ◆ Pictures and sounds allocated to entries are not transferred.

Copying the displayed number to the directory

You can copy numbers displayed in a list, e.g. the calls list or the redial list, or in an SMS to the directory.

If you have CNIP, the first 16 characters of the transmitted name are also copied to the **Surname** line.



A number is displayed:


Options → **Copy to Directory**

- ▶ Complete the entry → page 34.

Copying a number or e-mail address from the directory



In some operating situations, you can open the directory to copy a number or e-mail address, for example. Your handset need not be in idle status.

- ▶ Depending on the operating situation, open the directory with  or .


 Select entry (→ page 35).

Saving an anniversary in the directory

For each number in the directory, you can save an anniversary and specify a time at which a reminder call should be made on the anniversary (default setting: **Anniversary: Off**).

 →  (Select entry)

View **Edit** Press the display keys one after the other.

 Scroll to the Anniversary line.

 Select **On**.

- Change multiple line input:

Annivers. (Date)

Enter day/month/year in 8-digit format.

Anniversary (time)

Enter the hour/minute for the reminder call in 4-digit format.

Anniversary (tone)



Select the type of signal for the reminder.

Save Press the display key.


Please note


A time must be specified for reminder calls. If you select a visual signal, a time is not required and is automatically set to 00.00.

Deactivating anniversaries

 →  (Select entry)

View **Edit** Press the display keys one after the other.

 Scroll to the Anniversary line.

 Select **Off**.

Save Press the display key.

Reminder call on an anniversary

In idle status, a reminder call is shown in the handset display and indicated by the selected ringtone.



You can:

SMS Write an SMS.

Off Press the display key to acknowledge and end the reminder call.


When you are on the phone a reminder call is indicated on the handset with a **single** advisory tone.


Anniversaries that are indicated during a call and that are elapsed are entered in the **Missed Alarms** list (→ page 40).


Redial list

The redial list contains the twenty numbers last dialled with the handset (max. 32 digits). If one of the numbers is in the directory, the corresponding name will be displayed.

Manual redial


 Press the key **briefly**.


 Select entry.

 Press the talk key again.
The number is dialled.


When a name is displayed, you can display the corresponding phone number by pressing the display key **View**.

Managing entries in the redial list

 Press the key **briefly**.

 Select entry.

Options Open menu.

The following functions can be selected with :

Copy to Directory

Copy an entry to the directory (page 34).

Display Number (as in the directory, page 35)

Delete Entry (as in the directory, page 35)

Delete All (as in the directory, page 36)

Incoming SMS message list

All received SMS messages are saved in the incoming message list → page 44.

Call lists

Precondition: Calling Line Identification (CLIP, page 29)

Your telephone stores various types of calls:

- ◆ Accepted calls
- ◆ Outgoing calls
- ◆ Missed calls

You can view each type of call separately or gain an overview of all calls. Each call record contains the last 20 numbers in its category.

When in idle status, open the call lists by selecting the **Calls** display key or via the menu:



List entry

New messages are displayed at the top.

Example of list entries:

All Calls	
	Frank
	14.10.11, 15:40
	089563810
	14.10.11, 15:32
	...0123727859362922
	14.10.11, 15:07
View	Options

- ◆ List type (in header)
- ◆ Status of entry
Bold: New entry
- ◆ Number or name of caller
- ◆ Date and time of call (if set, page 15)
- ◆ Type of entry:
 - Accepted calls ()
 - Missed calls ()
 - Outgoing calls ()

Press the talk key to return the calls selected.

Select the **View** display key to access additional information, including for example the number linked to the name. If you have CNIP, then the name and town that is registered with your network provider for the calling number will be displayed. If the name and town are not shown, it means that the caller has not requested Calling Line Identification or that Calling Line Identification has been withheld.

Select the **Options** display key to select the following options:

Copy to Directory

Copying a displayed number to the directory.

Delete Entry

Delete selected entry.

Delete All

Delete all entries.

When you quit the call lists, all entries are set to the status "old", i.e. the next time you open the call list they will no longer be shown in bold.

Message key function





Opening lists

You can use the message key to open the following list selection:





- ◆ network mailbox, if your network provider supports this function and a shortcut is set for the network mailbox (→ page 51).
- ◆ Incoming message list (→ page 44)
If **several** mailboxes are set up (→ page 47), several lists are displayed.
- ◆ List of missed calls
- ◆ List of missed appointments (→ page 40)

An advisory tone sounds as soon as a **new message** arrives in a list.

In **idle status**, the display shows an icon for the new message:


Icon	New message...
	...on the network mailbox
	... in list of missed calls
	... in the SMS list
	... in the Missed Alarms list:

The number of **new** entries is displayed under the corresponding icon.

			
02	10	09	08

Please note

If calls are saved in the network mailbox, you will receive a message if the appropriate settings have been made (see your network provider user guide).


After pressing the message key  you will see all the lists that contain messages and the network mailbox list.

Lists containing new messages are at the top of the list and are marked in a bold font.


Messages & Calls	
Calls:	(3)
Missed Alarms	(1)
SMS:	(2)
Back	OK

Select a list with . To open, press **OK**.

Disabling/enabling message key flashing

You can select whether the message key  flashes (default setting) or does not flash when new messages arrive. Please do the following:



- ▶ Press the key sequence:




The following is displayed:



System
97



- ▶ Press one of the following keys to select the message type:

 for missed calls
or  for new SMS


Your selection is displayed (e.g. 5 for missed calls); the current setting flashes:

System
975 SET:


- ▶ Press key  or , to set the behavior for new messages:

 message key flashes (it stops when the key is pressed)
or  message key does not flash


Your selection is displayed (e.g. 1):

System
975 SET:


- ▶ Press the display key **OK**.

List of missed appointments

Missed anniversaries (→ page 36) are saved in the **Missed Alarms** list if:

- ◆ You do not accept an anniversary.
- ◆ The anniversary was signalled during a phone call.
- ◆ The handset is deactivated at the time of the anniversary.
- ◆ Open the list by pressing the **messages key**  (→ page 38).

Each entry is shown with

- ◆ Number or name
- ◆ Date and time

The most recent entry is at the head of the list.

Press the display key **Delete** to delete the selected entry.

If 10 entries are already stored in the list, the next appointment reminder will delete the oldest entry.

Making cost-effective calls

Make phone calls through a network provider who offers particularly low-cost call rates (call-by-call).

Automatic network provider code (preselection)

You can store a call-by-call number (preselection number), which is **automatically** placed in front of numbers when you dial them.

In the "**With Preselection**" list, specify the dialling codes or the first digits of the dialling codes with which you wish the preselection number to be used.

In the "**No Preselection**" list enter the exception to the "With Preselection" list.


Example:

Preselection No.	0999
With Preselection	08
No Preselection	081 084

All numbers that start with 08 except for 081 and 084, are dialled with the preselection number 0999.

Phone number	Dialled number
07112345678	→ 07112345678
08912345678	→ 0999 08912345678
08412345678	→ 08412345678

Saving preselection numbers

 →  → Telephony → Preselection
→ Preselection No.



Enter or change the preselection number (call-by-call number).



Save

Press the display key.

Save or change entries in the preselection lists

Each of the two lists can contain 20 entries, each with 6 digits.

Numbers may be prefixed according to the country in the "with preselection" list. This means, for example, that all national calls or calls to the mobile network are **automatically** linked to the preselection number you have saved previously.

 →  → Telephony → Preselection
→ With Preselection / No Preselection



Select entry.





Enter or edit first digits of number.



Save

Press the display key.

Temporarily cancelling preselection

 (press and hold) → **Options**
→ Preselection off →  (Select number)

Permanently deactivating preselection

 →  → Telephony → Preselection
→ Preselection No.

<C

Press and hold the display key until the preselection number is deleted.

Save

Press the display key.

SMS (text messages)

Your device is delivered ready to send SMS messages.

Preconditions:

- ◆ Calling Line Identification is enabled for your phone line.
- ◆ Your network provider supports SMS on the fixed line network (information on this can be obtained from your network provider).
- ◆ You are registered with your service provider to send and receive SMS.
- ◆ To receive SMS messages you must be registered with your service provider. This is completed automatically when you send your first SMS.

Please note

If your phone is connected to a PABX, please read → page 49.

Writing/sending an SMS

Writing an SMS



Mailbox 2 Select mailbox if necessary and press **OK**.



Enter mailbox PIN if necessary and press **OK**.

New SMS Select and press **OK**.



Write an SMS.

Please note

- ◆ For instructions on how to enter text and special characters, please see page 72.
- ◆ An SMS can be up to 612 characters. If there are more than 160 characters, the SMS is sent as a **linked** SMS (up to 4 SMS messages with 153 characters each). The number of characters remaining and which part of a linked SMS has already been written is shown in the top right of the display.

Sending an SMS



Press the talk key

Or:



Press the display key.

Send

Select and press **OK**.

SMS

Select and press **OK**.



Select number with area code (even if you are in that area) from the directory or enter directly. For sending SMS to an SMS mailbox: add the mailbox ID to the **end** of the number.

Send

Press the display key. The SMS is sent.

Please note

- ◆ If you are interrupted by an external call while writing an SMS, the text is automatically saved in the draft SMS list.
- ◆ If the memory is full, or if the SMS function on the base is being used by another handset, the operation is cancelled. An appropriate message appears in the display. Delete SMS messages you no longer require or send the SMS later.

SMS status report


Precondition: Your network provider supports this feature.

If you have activated the status report, you will receive an SMS with a confirmation message after sending.

Activating/deactivating status reports


 →  → Settings

Status Report

Select and press **Change**
 = on).

Reading/deleting status report/saving number to directory

- ▶ Open the incoming message list (→ page 44) and then:

 Select SMS with **State OK** or **State not OK** status.

Read Press the display key.

- ◆ Delete:
Options → **Delete Entry** → **OK**.
- ◆ Copy to directory:
Options → **Copy to Directory** → **OK**.
- ◆ Delete entire list:
Options → **Delete All** → **OK**.

Draft SMS list

You can save an SMS in the draft SMS list, and edit and send it later.

Saving an SMS in the draft SMS list

- ▶ You are writing an SMS (→ page 42).

Options Press the display key.

Save Entry Select and press **OK**.

Opening the draft SMS list

 →  → if necessary  (Mailbox, mailbox PIN) → **Draft**

The first list entry is displayed, e.g.


```


Saved
14.10.11 15:07
  
```

The number will be displayed in the first line, if the entry has been saved with the phone number, i.e. when the SMS was saved from the incoming message list.

Reading or deleting SMS messages

- ▶ Open the draft SMS list and then:

 Select SMS.

Read Press the display key. The entry will be displayed. Scroll line by line using .

Or delete the SMS with

Options → **Delete Entry** → **OK**.

Writing/changing an SMS

- ▶ You are reading an SMS in the draft SMS list.

Options Open menu.

You have the following options:

Send

Send stored SMS.

Edit

Edit the text of the saved SMS and then send it (→ page 42).

Character Set

Display text in the selected character set.

Deleting draft SMS list

- ▶ Open the draft SMS list and then:

Options Open menu.

Delete All Select, press **OK** and confirm with **Yes**. The list is cleared.



Sending SMS messages to an e-mail address

If your service provider supports the **SMS as e-mail** feature, you can also send your SMS messages to e-mail addresses.

The e-mail address must be at the beginning of the text. You must send the SMS to the e-mail service of your SMS send centre.

 →  → (Mailbox, mailbox PIN)

→ **New SMS**

 /  Load the e-mail address from the directory or enter it directly. End the entry with a space or colon (depending on the service provider).

 Enter the SMS text.

Options Press the display key.

Send Select and press **OK**.

E-mail Select and press **OK**. If the number of the e-mail service is not entered (→ page 48), enter the number of the e-mail service.

Send Press the display key.

Sending SMS messages as a fax

You can also send an SMS to a fax machine.



Precondition: Your network provider supports this feature.

▶ You are writing an SMS (→ page 42).

Options Press the display key.

Send Select and press **OK**.

Fax Select and press **OK**.

 /  Select number from the directory or enter it manually. Enter the number with area code (even if you are in the same area).

Send Press the display key.

Receiving an SMS

All received SMS messages are saved in the incoming SMS list. Linked SMS messages are displayed as **one** message. If this is too long or is not transferred completely, it is split into individual messages. Since an SMS remains in the list even after it has been read, you should **regularly delete SMS messages from the list**.

The display tells you if the SMS memory is full.



Please note

Each incoming SMS is signalled by a single ring (ringtone as for external calls). If you accept such a "call", the SMS will be lost. To prevent this ring, suppress the first ringtone for all external calls (→ page 49).

Incoming SMS list

The incoming SMS list contains:

- ◆ All received SMS messages, starting with the most recent.
- ◆ SMS messages that could not be sent due to an error.

New SMS messages are signalled on all Gigaset C610H handsets by the  icon in the display, the flashing message key  and an advisory tone.

Opening the incoming SMS list with the key

 Press.

The incoming message list is indicated by the mailbox name and the number of entries (example):


SMS: (2)

bold: new entries

normal font: read entries



If necessary select a mailbox and open list by selecting **OK** (if necessary enter mailbox PIN and confirm by pressing **OK**).

The number and date of receipt are displayed in the entry list.



0123727859362922
14.10.11 09:07

Opening the incoming message box via the SMS menu

 →  → if necessary select mailbox, enter mailbox PIN) → **Incoming**

Deleting the incoming SMS list

All **new and old** SMS messages in the list are deleted.


- ▶ Open the incoming message box.


Options Open menu.

Delete All Select, press **OK** and confirm with **Yes**. The list is cleared.

Reading or deleting SMS messages

- ▶ Open the incoming message list, then:

 Select SMS.

Read Press the display key. The entry will be displayed. Scroll line by line using .

Or delete the SMS with

Options → **Delete Entry** → **OK**.

After you have read a new SMS, it is given the status "Old" (is no longer shown in bold).

Changing the character set

- ▶ Reading an SMS

Options Press the display key.

Character Set

Text is shown in the selected character set.

Replying to or forwarding text messages

- ▶ Reading an SMS

Options Press the display key.

You have the following options:

Reply

Write and send a new SMS in reply to the sender (→ page 42).

Edit

Edit the text in the SMS and return it to the sender (→ page 42).

Forward

Forward the SMS to another number (→ page 42).

Copying the number to the directory

Copying the sender's number

- ▶ Open the incoming message list and select entry (→ page 44).

Options → **Copy to Directory**

- ▶ Complete the entry → page 36.


Please note

An attached mailbox identifier is added to the directory.

Copying/dialling numbers from an SMS text


- ▶ Read the SMS and scroll to the telephone number.

The digits are highlighted.

 Press the display key.

Complete the entry → page 36.


Or:

 Press the talk key to dial the number.

If you wish to use the number to send an SMS:

- ▶ Save the number with the local area code (dialling code) in the directory.

SMS with vCard

The vCard is an electronic business card. It is displayed by the  symbol in the body of the SMS.

A vCard can include:

- ◆ Name
- ◆ Private number
- ◆ Business number
- ◆ Mobile phone number
- ◆ Birthday

Entries in a vCard can individually be saved to the directory one after the other.

Opening the vCard

- ▶ Read the SMS containing the vCard.

View Press the display key.
To return to the body of the SMS, press **Back**.

 Select number.

Save Press the display key.

When you save a number, the directory is opened automatically. The number and name are copied. If a birthday is entered on the vCard, the date is copied to the directory as an anniversary.

- ▶ If necessary, edit the entry in the directory and save it. You will return to the vCard automatically.

Notification by SMS

You can be notified about missed calls via SMS.

Precondition: For missed calls, the caller's number (CLI) must have been transmitted.

Notification is sent to your mobile phone or another device with SMS functionality.

You only need to save the telephone number to which you wish the message to be sent.

 →  → **Settings** → **Notification**

- ▶ Change multiple line input:

To:

Enter the number to which the SMS should be sent.

On missed call

Select **On** if you require SMS notification.

Save Press the display key.

Warning

Do **not** enter your own fixed line network number for the notification of missed calls. This can lead to chargeable endless looping.

SMS mailboxes




The **general mailbox** is the default setting. Anyone can access this mailbox and it cannot be protected by a PIN. You can additionally set up three **personal mailboxes** and protect these with a **PIN**. Each mailbox is identified by a name and a "mailbox ID" (a kind of extension number).

Please note:

- ◆ If you operate a number of devices (bases) with SMS functionality on a single phone line, then each SMS mailbox ID may only occur once. In this case you must also change the preset ID of the general mailbox ("0").
- ◆ You can only use personal mailboxes if your service provider supports this function. You can tell whether this is the case by the addition of a star (*) to the number of a (preset) SMS centre.
- ◆ If you have forgotten your mailbox PIN, you can reset it by restoring default settings of the base. This will **delete all SMS messages from all mailboxes**.

Setting up and changing a personal mailbox

Setting up a personal mailbox

 →  → **Settings** → **SMS Mailboxes**
 Select mailbox, e.g. **Mailbox 2** and press **Edit**.

- ▶ Change multiple line input:

Activation:

Activate or deactivate mailbox.

Name:

Enter name.

Box ID:

Select mailbox ID (0–9). You can only select the available numbers.


Protection:

Activate/deactivate PIN protection.

SMS PIN

If necessary, enter 4-digit PIN.

Save Press the display key.

Active mailboxes are marked with ✓ in the mailbox list. They are shown in the SMS list and can, if necessary, be displayed by pressing the message key .

Deactivating a mailbox

- ▶ Set **Activation** to **Off**. Confirm message with **Yes** if necessary.

All SMS messages saved in this mailbox will be deleted.

Deactivating PIN protection


- ▶ Set **Protection** to **Off**.

The mailbox PIN is reset to "0000".

Changing the name of a mailbox

 →  → **Settings** → **SMS Mailboxes**
 →  (Select mailbox)

Edit Press the display key.

 Enter new name.

Save Press the display key.

Changing a mailbox's PIN and ID

 →  → **Settings** → **SMS Mailboxes**
 →  (Select mailbox)

 Enter mailbox PIN if necessary and press **OK**.

- ▶ Set **Box ID**, **Protection** and **SMS PIN** (→ page 47).

Sending an SMS to a personal mailbox

To send an SMS to a personal mailbox, the sender must know your ID and enter it after your number.

- ▶ You can send your SMS contact an SMS via your personal mailbox.

Your SMS contact will receive your SMS number with current ID and can save it in their directory. If the ID is invalid, the SMS will not be delivered.

Setting SMS centres




SMS messages are exchanged between SMS centres operated by service providers. You must enter the SMS centre through which you wish to send and receive SMS messages into your phone. You can receive SMS messages from **every** SMS centre that is entered, provided you have registered with your service provider.

Your SMS messages are sent via the **SMS centre** that is entered as the active **send service centre**. However, you can activate any other SMS centre as the active send service centre to send a current message (→ page 48).

If no SMS service centre is entered, the SMS menu only contains the entry **Settings**. Enter an SMS Service Centre (→ page 48).

Entering/changing SMS centres

- ▶ You should find out about the services and special functions offered by your service provider **before you make a new application** and/or before you delete pre-configured call numbers.

 →  → **Settings** → **Service Centres**
 Select SMS centre (e.g. **Service Centr.1**) and press **Edit**.

- ▶ Change multiple line input:

Active Send:

Select **Yes** if SMS messages are to be sent via the SMS centre. For the SMS centres 2 to 4, the setting only applies to the next SMS.

SMS Service Centre no.:

Enter the number of the SMS service and insert a star if your service provider supports personal mailboxes.

Send e-mail to:

Enter the number of the e-mail service.

Save Press the display key.

Please note

Ask your service provider for details on how to enter service numbers if you wish to use personal mailboxes (precondition: your service provider supports this function).

Sending an SMS via another SMS centre

- ▶ Activate the SMS centre (2 to 4) as the active send service centre.
- ▶ Send the SMS.

This setting only applies to the next SMS to be sent. After that, the setting returns to **Service Centr. 1**.

SMS info services


You can have your service provider send you specific information by SMS (e.g. weather forecast or the lottery numbers). A total of up to 10 info services can be saved. You can obtain information about the info services available and their costs from your service provider.

Setting up/ordering a SMS service

Ordering an SMS service


 →  → SMS Service


 Select SMS service.


 Press the display key.

Setting up an SMS service

▶ Select an empty entry, delete beforehand if necessary. Then:


 Press the display key.

 If necessary, enter code, designation and destination number.


 Press the display key.


Editing the entry of an SMS service

▶ Select the SMS service (see above). Then:

 Open menu.


Edit Entry Select and press **OK**.

 If necessary, change the code, designation or destination number.

 Press the display key.

Deleting an SMS service

▶ Select the SMS service (see above). Then:

 Open menu.

Delete Entry


Select and press **OK**.










SMS on a PABX

- ◆ You can only receive an SMS when the **Calling Line Identification is forwarded** to the extension of the PABX (**CLIP**). The CLIP evaluation of the SMS centre number is completed in your **Gigaset**.
- ◆ Depending on your PABX, you may have to add the access code (external line prefix) before the number of the SMS centre.
- If in doubt, test your PABX, e.g. by sending an SMS to your own number: once with and once without the access code.
- ◆ When you send SMS messages, your sender number may be sent without your extension number. In this case the recipient cannot reply to you directly.



Sending and receiving SMS messages on **ISDN PABXs** is only possible via the MSN number assigned to your base.

Activating/deactivating first ringtone muting

 Open the main menu.

Press keys.

  Make the first ring audible.

Or:

  Mute the first ring.

Activating/deactivating SMS function

If you deactivate the SMS function, you cannot send or receive any SMS messages with your phone.

The settings you have selected for sending and receiving SMS messages (e.g. the numbers of the SMS centres) and the entries in the incoming and draft SMS lists are saved even after you turn off your phone.



Open the main menu.



Enter the digits.



Deactivate the SMS function.

Or:



Activate the SMS function (default setting).

SMS troubleshooting

Error codes when sending

E0	Calling Line Identification permanently withheld (CLIR) or Calling Line Identification not activated.
FE	Error occurred during SMS transmission.
FD	Connection to SMS centre failed; see self-help.

Self-help with errors

The following table lists error situations, possible causes and provides notes on troubleshooting.

You cannot send messages.	
1.	You have not requested the CLIP service (Calling Line Identification Presentation). <ul style="list-style-type: none"> ▶ Ask your service provider to enable this service.
2.	SMS transmission has been interrupted (e.g. by a call). <ul style="list-style-type: none"> ▶ Re-send the SMS.
3.	The network provider does not support this feature.

4. No number or an invalid number is entered for the SMS centre set as the active send service centre.
 - ▶ Enter the number (→ page 48).

- You receive an incomplete SMS.
1. Your phone's memory is full.
 - ▶ Delete old SMS messages (→ page 43).
 2. The service provider has not yet sent the rest of the SMS.

- You have stopped receiving SMS messages.
1. You have changed the ID of your mailbox.
 - ▶ Give your SMS contacts your new ID or undo the change (→ page 47).
 2. You have not activated your mailbox.
 - ▶ Activate your mailbox (→ page 47).
 3. Call divert (redirecting) is activated with **When: All Calls** or for the network mailbox by selecting **All Calls**.
 - ▶ Change the call divert (→ page 31).

- The SMS is played back.
1. The "display call number" feature is not activated.
 - ▶ Ask your service provider to activate this function (chargeable).
 2. Your mobile phone operator and your fixed line network SMS service provider have no agreement to work together.
 - ▶ Obtain information from your fixed line network SMS service provider.
 3. Your terminal has been recorded by your SMS provider as having no fixed line network SMS functionality, i.e. you are not registered with the provider.
 - ▶ Send any SMS to automatically register your telephone to receive SMS.

- Messages are only received during the day.
- The terminal is recorded in your SMS provider's database as having no fixed line network SMS functionality, i.e. you are not registered with the provider.
- ▶ Obtain information from your fixed line network SMS service provider.
 - ▶ Send any SMS to automatically register your telephone to receive SMS.

Using the network mailbox

The network mailbox is your network provider's answering machine within the network. You cannot use the network mailbox unless you have **requested** it from your network provider.

Configuring fast access for the network mailbox

With fast access, you can dial the network mailbox directly.

Fast access is preset for the network mailbox. You only need to enter the number of the network mailbox.

Configuring fast access for the network mailbox and entering the network mailbox number

 →  → Network Mailbox



Enter the number for the network mailbox.

Save

Press the display key.


The setting for fast access applies to all Gigaset C610H handsets.

Calling the network mailbox



Press and **hold**. You are connected directly to the network mailbox.



Press handsfree key  if required. You will hear the network mailbox announcement.

Viewing the network mailbox message

When a message is recorded, you receive a call from the network mailbox. If you have requested Calling Line Identification, the network mailbox number will be displayed. If you accept the call, the new messages are played back. If you do not accept the call, the network mailbox number will be saved in the missed call list and the message key flashes (→ page 38).

ECO DECT

You are helping to protect the environment with your Gigaset CS590.

Reduced energy consumption

By using an energy-saving power supply, your telephone consumes less power.

Reducing radiation

The radiation from your telephone is reduced **automatically**:

- ◆ **Handset:** The closer the handset is to the base, the lower the radiation.
- ◆ **Base station:** The radiation is reduced to virtually zero when only one handset is registered and the handset is placed in the base.

You can reduce the radiation from the handset and base even more by using **Eco Mode**:



- ◆ **Eco Mode**
Reduces the radiation of the base station and handset by 80% - whether you are making a call or not. **Eco Mode** reduces the range of the base station by approx. 50%. Using **Eco Mode** always makes sense when a reduced range is sufficient.

Switching off radiation

- ◆ **Eco Mode+**
When you activate **Eco Mode+**, radiation (DECT transmission power) from the base and handset is switched off in the idle state.
This is also true when multiple handsets are used, provided the handsets support **Eco Mode+**.






Eco Mode / Eco Mode+ can be activated/deactivated independently of one another and can also be used with multiple handsets. The handset does not have to be in the base.

Activating/deactivating the Eco Mode / Eco Mode+


 →  → **Eco Mode**
→ **Eco Mode / Eco Mode+**

Change Press the display key (☑ = on).

Status displays

Display icon	
	Signal strength: – good to poor – no signal
 white	Eco Mode deactivated
 green	Eco Mode enabled
 white	Eco Mode+ enabled (displayed instead of the reception strength icon when in idle status)
 green	Eco Mode and Eco Mode+ activated



Please note

- ◆ With **Eco Mode+** enabled, press and hold the talk key  to check that the base can be reached. You will hear the dialing tone if the base can be reached.
- ◆ When **Eco Mode+** is enabled:
 - call setup will be delayed by approx. 2 seconds.
 - handset standby time will be reduced by approx. 50%.
- ◆ Registering handsets that do not support **Eco Mode+** will cause the mode to be deactivated on the base and all other handsets.
- ◆ Activating **Eco Mode** reduces the range of the base.
- ◆ **Eco Mode / Eco Mode+** and repeater support (→ page 63) cancel each other out, i.e. if you use a repeater you cannot use **Eco Mode** and **Eco Mode+**.

Setting the alarm clock

Precondition: The date and time have already been set (→ page 15).

Activating/deactivating the alarm clock and setting the wake-up time

 →  → Alarm Clock

▶ Change multiple line input:

Activation:

Select **On** or **Off**.

Time:

Enter the wake-up time in 4-digit format.

Volume:

Set the volume (1–6).

Melody:

Select melody.

Save Press the display key.

In idle status, the  icon and wake-up time are displayed.

A wake-up call is signalled on the display and with the selected ringtone (→ page 2). The wake-up call sounds for 60 seconds. If no key is pressed, the wake-up call is repeated twice at five minute intervals and then switched off.

During a call, the wake-up call is only signalled by a short tone.

Deactivating the wake-up call/ repeating after a pause (snooze mode)

Precondition: A wake-up call is sounding.

OFF Press the display key. The wake-up call is deactivated.

or

Snooze Press the display key or any key. The wake-up call is deactivated and then repeated after 5 minutes. After the second repetition the wake-up call is deactivated completely.

Using several handsets

Registering handsets

You can register up to six handsets to your base.

A Gigaset C610H handset can be registered on up to four bases.

Manual registration of the Gigaset C610H on Gigaset C610

You must activate manual registration of the handset on both the handset (1) and the base (2).



When the registration process has completed successfully, the handset returns to idle status. The handset's internal number is shown in the display e.g. INT 1. If not, repeat the procedure.

1) On the handset


The handset must not be registered to a base.


Register Press the display key.

The handset is already registered to a base:

 →  → Registration
→ Register Handset

If the handset is already registered on four bases:

 Select base, e.g. **Base 3** and press **OK**.

 If required, enter the system PIN for the base and press **OK**.

A message displays that a search for a base that is ready for registration is being carried out.

2) On the base

Within 60 seconds press and **hold** the registration/paging key on the base (→ page 1) (approx. 3 seconds).

Using several handsets

Registering other handsets

You can register other Gigaset handsets and handsets for other devices with GAP functionality as follows.

1) On the handset

- ▶ Start to register the handset as described in its user guide.


2) On the base


Press and **hold** the registration/paging key on the base (→ page 1) (approx. 3 sec.).

De-registering handsets

You can de-register any other registered handset from any registered Gigaset C610H handset.

-  →  → **Registration**
→ **De-reg. Handset**

-  Select the internal subscriber you wish to deregister and press **OK**.
(The handset you are currently using is highlighted with <).

-  Enter the current system PIN and press **Save**.


- Yes** Press the display key.

Locating a handset ("Paging")

You can locate your handset using the base.




- ▶ **Briefly** press the registration/paging key on the base (→ page 1).
- ▶ All handsets will ring simultaneously ("paging"), even if the ringtones are deactivated.

Ending paging

- ▶ **Briefly** press the registration/paging key on the base or press the talk key  on the handset.

Changing the base



If your handset is registered to more than one base, you can set it to a particular base or to the base that has the best reception (**Best Base**).

-  →  → **Registration** → **Select Base**
 Select one of the registered bases or **Best Base** and press **Select**.




Making internal calls

Internal calls to other handsets registered on the same base are free.



Calling a specific handset

-  Initiate internal call.
-  Enter the number of the handset.


Or:

-  Initiate internal call.
-  Select handset.
-  Press the talk key.

Calling all handsets ("group call")


-  Initiate internal call.
-  Press the star key.

or

- Call All** Select menu option and
-  Press the talk key.



All handsets are called.

Ending a call

-  Press the end call key.


Transferring a call to another handset

You can transfer an external call to another handset (connect).

-  Open the list of handsets. The external participant hears hold music if activated (→ page 63).
-  Select a handset or **Call All** and press **OK**.


When the internal participant answers:

- ▶ If necessary, announce the external call.

-  Press the end call key.

The external call is transferred to the other handset.

If the internal participant does **not** answer or the line is busy, press the display key **End** to return to the external call.



When transferring a call you can also press the end call key  before the internal participant answers.

Then, if the internal participant does not answer or the line is busy, the call will automatically return to you.

Internal consultation/conference calls

When you are conducting an **external** call, you can call an **internal** participant at the same time for consultation or hold a conference call between all 3 participants.

You are conducting an **external** call:

-  Open the list of handsets. The external participant hears hold music if activated (→ page 63).
-  Select handset and press **OK**. You are connected to the internal participant.


either:


- End** Press the display key. You are reconnected with the external participant.

Or:

- Conference** Press the display key. All 3 participants are connected with each other.

Ending a conference call

-  Press the end call key.

If an **internal** participant presses the end call key , the other handset remains connected to the external participant.

Accepting/rejecting call waiting

If you receive an **external** call during an **internal** call, you will hear the call waiting tone (short tone). The caller's number or name will appear in the display if Calling Line Identification is enabled.

Ending an internal call, accepting an external call

- Accept** Press the display key.

The internal call is **ended**. You are connected to the external caller.

Rejecting the external call

- Reject** Press the display key.

The call waiting tone is turned off. You remain connected with the internal participant. The ringtone can still be heard on other registered handsets.

Listening in to an external call

Precondition: The Listening In function must be activated.

You are conducting an external call. An internal participant can listen in on this call and take part in the conversation. All participants are made aware of the "listening in" by a signal tone.


Activating/deactivating listening in

 →  → Telephony → Listening In

Press **Change** to activate/deactivate the function (= on).


Internal listening in

The line is engaged with an external call. Your screen will display information to that effect. You want to listen in to the external call.


 Press and **hold** the talk key.

You can listen in to the call. All participants hear a signal tone. During this time, this handset displays the **Conference** message and it is not possible to dial another number from this handset.

Ending listening in


 Press the end call key.

All participants hear a signal tone.

If the **first** internal participant presses the end call key , the handset that has "listened in" remains connected to the external participant.

Changing the name of a handset


The names "INT 1", "INT 2" etc. are assigned automatically on registration. You can change these names. The name must be no more than 10 characters. The changed name is displayed in every handset list.

 Open the list of handsets. Your own handset is indicated by ◀.

 Select handset.

Options Open menu.


Rename

 Enter name.

Save Press the display key.

Changing a handset's internal number


A handset is **automatically** assigned the lowest free number when it is registered. If all slots are occupied, number 6 is overwritten if this handset is in idle status. You can change the internal number of all registered handsets (1–6).

 Open the list of handsets. Your own handset is indicated by ◀.

Options Open menu.

Assign Handset No.

Select and press **OK**.

 Select number. Only numbers that have not been assigned are displayed.

Save Press the display key to save the input.

Using a handset as a room monitor (Babyphone)

If the room monitor is activated, a previously saved destination number is called as soon as a set noise level is reached. You can save an internal or external number in your handset as the destination number. All of the handset keys are deactivated, with the exception of the display keys.

The room monitor call to an external number is terminated after approximately 90 seconds. The room monitor call to an internal number (handset) stops after approx. 3 minutes (depending on the base). When the room monitor is activated, all keys are locked except the end call key. The handset's speaker can be switched on or off (**Two Way Talk = On or Off**). If **Two Way Talk** is switched on, you can answer the room monitor call.

When the room monitor is activated, incoming calls to the handset are indicated **without a ringtone** and are only shown on the screen. The display and keypad are not illuminated and advisory tones are also turned off.

If you accept an incoming call, the room monitor is suspended for the duration of the call, but the function **remains** activated.

If you deactivate then reactivate the handset, the room monitor remains activated.

Warning!

- ◆ You should always check the operation of the room monitor before use. For example, test its sensitivity. Check the connection if you are diverting the room monitor to an external number.
- ◆ When the function is switched on, the handset's operating time is considerably reduced. If necessary, place the handset in the base/charging cradle. This ensures that the battery does not run down.
- ◆ Ideally the handset should be positioned 1 to 2 metres away from the baby. The microphone must be directed towards the baby.
- ◆ The connection to which the room monitor is diverted must not be blocked by an activated answering machine.

Activating the room monitor and entering the destination number

 →  → Room Monitor


▶ Change multiple line input:

Activation:

Select **On** to activate.

Alarm to:

Select **Internal** or **External**.

External number: Select the number from the directory (press display key  or enter it directly.

Internal number: Select display key **Change** → Select handset or **Call All** if you want to call all registered handsets → **OK**.

In idle status, the destination number or the internal destination number is displayed.

Two Way Talk:

Switch the handset's speaker on or off (select **On** oder **Off**).


Sensitivity:

Select sensitivity for noise level (**Low** or **High**).

Handset settings

- ▶ Press **Save** to save the settings.

When the room monitor function is activated, the idle display looks as shown below:



Changing the set destination number

→ → **Room Monitor**

- ▶ Enter and save number as described in "Activating the room monitor and entering the destination number" (→ page 57).

Cancel/deactivate room monitor

Press the end call key to cancel the call when the **room monitor is activated**.

In the idle status press the display key **OFF** to deactivate the room monitor mode.

Deactivating the room monitor remotely

Preconditions: The phone must support tone dialling and the room monitor should be set for an external destination number.

- ▶ Accept the call from the room monitor and press keys .

The room monitor function will deactivate after the call ends. There will be no further room monitor calls. The other room monitor settings (e.g. no ringtone) on the handset will remain activated until you press the display key **OFF** on the handset.

To reactivate the room function with the same phone number:

- ▶ Turn on the activation again and save with **Save** (→ page 57).

Handset settings

Your handset is preconfigured, but you can change the settings to suit your individual requirements.

Quick access to numbers and functions

You can assign a **number from the directory** to each of the **digit keys** and to .

The left and right **display keys** have a **function** pre-selected by default. You can change the assignment (→ page 59).

The number is then dialled or the function started by simply pressing a key.

Assigning digit keys

Precondition: You have not yet assigned a number to the digit key.

- ▶ Press and **hold** the digit key.
or
Press the digit key **briefly** and press the **QuickDial** display key.

The directory is opened.

- ▶ Select an entry and press **OK**.

The entry is saved on the appropriate digit key.

Please note

If you delete or edit the entry in the directory at a later date, this will not affect the assignment to the number key.

Dialling a number/changing assignment

Precondition: The digit key already has a number assigned to it.

When the handset is in idle status

- ▶ Press and **hold** the digit key.
The number is dialled immediately.

or

- ▶ **Briefly** press the digit key:
Press the display key with number/name (abbreviated if necessary) to dial the number **or**
Press the **Change** display key to change the digit key assignment or to delete the assignment.

Changing display key assignments

- ▶ Press and **hold** the left or right display key.

The list of possible key assignments is opened. The following can be selected:

Room Monitor

Assign menu for setting and activating the room monitor to a key (→ page 57).

Alarm Clock

Assign menu for setting and activating the alarm clock to a key (→ page 53).

Redial

Display the redial list.

More Functions...

More features are available:

INT

Internal calls (→ page 54).



SMS


Assign menu for SMS functions to a key (→ page 42).

- ▶ Select an entry and press **OK**.

Changing the display language




You can view the display texts in different languages.


 →  → **Language**

The current language is indicated by a .

 Select language and press **Select**.

If you accidentally choose a language you do not understand:

 →  


 Select the correct language and press the **right display key**.

Setting the display

Setting the screensaver

You can set a picture or the time to be displayed as a screensaver when the handset is in idle status. This will replace the idle status display. It may conceal the date, time and name.

The screensaver is not displayed in certain situations, e.g. during a call or if the handset is deregistered.

If a screensaver is activated, the **Screensaver** menu option is marked with .

 →  → **Display** → **Screensaver**

The current setting is displayed.

- ▶ Change multiple line input:


Activation:

Select **On** (screensaver is displayed)
or **Off** (no screensaver).


Selection:

Select screensaver **or**

View Press the display key. The active screensaver is displayed.

 Select screensaver and press **OK**.



Save Press the display key.

When the screensaver conceals the display, **briefly** press  to show the idle display.

Handset settings



Setting large font

You can increase the front size of print and symbols in selection fields, lists and in the directory to improve readability. After doing this, only one entry instead of multiple entries can be shown at the same time on each display and names are shortened where necessary.

 →  → **Display** → **Large Font**
Change Press display key (☑ = on).

Setting the colour scheme

You can set the display to have a dark or light background.

 →  → **Display** → **Colour Schemes**
Select **Colour Scheme 1** or **Colour Scheme 2** and press **OK**.

Setting the display backlight

Depending on whether or not the handset is in the base/charging cradle, you can activate or deactivate the lighting. If it is activated, the display is permanently dimmed. If the backlight is deactivated it is switched on by pressing any key. **Digit keys** appear on the display for pre-dialling; **all other keys** do not have any further functions.

 →  → **Display** → **Backlight**

The current setting is displayed.

► Change multiple line input:

In Charger

Select **On** or **Off**.

Out of Charger


Select **On** or **Off**.



Please note

With the **On** setting, the standby time of the handset can be significantly reduced.

Save Press the display key.

Activating/deactivating auto answer


If you activate this function, when you receive a call you can simply lift the handset out of the base/charging cradle without having to press the talk key .


 →  → **Telephony** → **Auto Answer**
Change Press display key (☑ = on).


Changing the speaker/earpiece volume


You can set the loudspeaker volume for handsfree talking and the earpiece volume to five different levels.

In idle status:

 Call up the **Handset Volume** menu.


 Set the earpiece volume.


 Scroll to the **Speaker:** line.

 Set the speaker volume.


Save Press the display key if necessary to save the setting permanently.

Setting the volume during a call:

 Press the control key.

 Select volume.

The setting will automatically be saved after approximately 3 seconds, if not then press the display key **Save**.

If  is assigned to another function, e.g. call swap (→ page 32):

Options Open menu.



Volume Select and press **OK**.

Configure setting (see above).

Please note

You can also set the call volume using the menu (→ page 27).

Changing ringtones



- ◆ **Volume:**
You can choose between five volumes (1–5; e.g. volume 3 = ) and the "crescendo" ringtone (6; volume increases with each ring = ).
- ◆ **Ringtones:**
You can select a ringtone from a list of pre-loaded ringtones.


You can set different ringtones for the following functions:


- ◆ Int. Calls
- ◆ Extern. Calls


Setting volume/melody

In idle status:

 →  → **Audio Settings**
→ **Ringtones(Handset)**
→ **Volume / Melodies**

 Set volume/melody for internal calls and anniversaries.

 Scroll to the next line.

 Set volume/melody for external calls.

Save Press the display key to save the setting.

Additionally for external calls:

You can specify a time period when you do not want the telephone to ring, e.g., during the night.

 →  → **Audio Settings**
→ **Ringtones(Handset)** → **Time Control**

For external calls:

Select **On** or **Off**.

If the time control is activated:

Suspend ring. from:

Enter the start of the period in 4-digit format.

Suspend ring. until:

Enter the end of the period in 4-digit format.

Please note

During this period, you will continue to receive calls from numbers to which you have assigned a VIP group in the directory.

Switching on/off the ringtone for anonymous calls

You can set your handset not to ring if a caller withholds their number. The call will only be signalled in the display.

In idle status:


 →  → **Audio Settings**
→ **Ringtones(Handset)**
→ **Anon. Calls Silent**

Press **Change** to activate/deactivate the function (= on).

Activating/deactivating the ringtone


You can deactivate the ringtone on your handset before you answer a call or when the handset is in idle status; the ringtone can be deactivated permanently or just for the current call. The ringtone cannot be re-activated while an external call is in progress.

Deactivating the ringtone permanently

 Press and **hold** the star key.

The  icon appears in the display.

Reactivating the ringtone

 Press and **hold** the star key.


Deactivating the ringtone for the current call


Silence Press the display key.

Handset settings

Activating/deactivating the alert tone

In place of the ringtone you can activate an alert tone. When you receive a call, you will hear a **short tone** ("Beep") instead of the ringtone.

 Press and **hold** the star key and **within 3 seconds**:



Beep Press the display key. A call will now be signalled by **one** short alert tone.
The  icon appears in the display.

Activating/deactivating advisory tones

Your handset uses advisory tones to tell you about different activities and statuses. The following advisory tones can be activated/deactivated independently of each other:

- ◆ **Key click**: every key press is confirmed.
- ◆ **Acknowledge tones**:
 - **Confirmation tone** (ascending tone sequence): at the end of an entry/setting and when an SMS or a new entry arrives in the call list
 - **Error tone** (descending tone sequence): when you make an incorrect entry
 - **Menu end tone**: when scrolling to the end of a menu
- ◆ **Battery low beep**: the battery requires charging.

In idle status:

 →  → **Audio Settings**
→ **Advisory Tones**

▶ Change multiple line input:

Key Tones:

Select **On** or **Off**.

Confirmation:

Select **On** or **Off**.

Battery:

Select **On** or **Off**.

Save

Press the display key.

Please note

You can also set the call volume, the ring-tones and the advisory tones via the menu (→ page 27).

Setting your own area code

In order to transfer phone numbers (e.g. in vCards), it is essential that your area code (international and local area code) is saved on the phone.

Some of these numbers are already preset.


 →  → **Telephony** → **Area Codes**


Check that the (pre)set area code is correct.

▶ Change multiple line input:

 Select/change input field.


 Navigate in the input field.

 If necessary, delete number:
press the display key.

 Enter number.

Save Press the display key.

Example:






Restoring the handset default settings

You can reset individual settings and changes that you have made.

The following settings are **not** affected by a reset



- ◆ Registration to the base
- ◆ Date and time
- ◆ Directory entries, the call lists, the SMS lists

 →  → **System** → **Handset Reset**
 Press the display key.

Base settings

The base settings are carried out using a registered Gigaset C610H handset.

Activating/deactivating music on hold

 →  → **Audio Settings**
 → **Music on hold**

Press **Change** to activate or deactivate the music on hold (= on).

Repeater support

With a repeater you can increase the range and signal strength of your base. You will need to activate repeater mode. This will terminate any calls that are in progress at the time.

Precondition: A repeater is registered.

 →  → **System** → **Repeater Mode**

Press **Change** to deactivate repeater mode (= on).

Please note



Eco Mode / Eco Mode+ (→ page 52) and repeater support cancel each other out, i.e. if you use a repeater you cannot use **Eco Mode** and **Eco Mode+**.

Protecting against unauthorised access

Protect the system settings of the base with a PIN known only to yourself. The system PIN must be entered when, for example, registering/deregistering a handset to/from the base or when restoring the default settings.

Changing the system PIN

You can change the 4-digit system PIN set on the base (default setting: **0000**) to a 4-digit PIN known only by you.

 →  → **System** → **System PIN**



Enter the current system PIN and press **OK**.



Enter your new system PIN and press **OK**.

Base settings

Resetting the system PIN

If you have forgotten your system PIN you can reset the base to the original code **0000**:

Disconnect the power cord from the base. Hold down the registration/paging key on the base while reconnecting the power cable to the base. Press and hold the key for at least five seconds.

The base has now been reset and the system PIN **0000** set.

Please note

All handsets are deregistered and must be re-registered. All settings are restored to the factory settings.

Restoring the base to the factory settings

When the settings are restored

- ◆ date and time will be retained
- ◆ handsets are still registered
- ◆ **Eco Mode** is switched on and **Eco Mode+** is switched off
- ◆ the system PIN is not reset



Enter the system PIN and press **OK**.




Press the display key.

Connecting the base to the PABX

The following settings are only necessary if your PABX requires them; see the PABX user guide.

You cannot send or receive SMS messages on PABXs that do not support Calling Line Identification.

Dialling modes and recall



The current setting is indicated by .

Changing the dialling mode

The following dialling modes can be selected:

- ◆ Tone dialling (DTMF)
- ◆ Dial pulsing (DP)



 →  → **Telephony** → **Dialling Mode**

 Select dialling mode and press **Select** ( = selected).

Setting recall

Your phone is preset at the factory for operation on the main connection. For operation on a PABX, you may have to change this value. Please refer to the user guide for your PABX.

 →  → **Telephony** → **Recall**

 Select recall and press **Select** ( = set value).

Possible values are:

80 ms, 100 ms, 120 ms, 180 ms,
250 ms, 300 ms, 400 ms, 600 ms,
800 ms.

Saving an access code (outside line code)

Precondition: You may have to enter an access code for external calls in your PABX, e.g. "0".

 →  → **Telephony** → **Access Code**



Enter or change access code, max. 3 digits.

Save


Press the display key.


If an access code has been saved:

- ◆ The access code is prefixed automatically when you select from the following lists: numbers of the SMS centres, calls list.
- ◆ The access code must be entered when dialling manually and when manually entering directory, emergency/shortcut numbers and SMS centre numbers.
- ◆ If you copy the recipient's number from the directory when sending an SMS, you have to delete the access code.
- ◆ An existing access code is deleted using **<C**.

Setting pauses


Changing the pause after line seizure

You can change the length of the pause that is inserted between pressing the talk key  and sending the number.

 Open the main menu.


   0 +      6 










Press keys.

 Enter digit for the pause length (1 = 1 sec.; 2 = 3 sec.; 3 = 7 sec.) and press **OK**.


Change pause after recall key

You can change the length of the pause if your PABX requires this (refer to the user guide for your PABX).

 Open the main menu.


   0 +      2 










Press keys.

 Enter a digit for the length of the pause (1 = 800 ms; 2 = 1600 ms; 3 = 3200 ms) and press **OK**.


Changing a dialling pause (pause after access code)


Precondition: You have saved an access code (→ page 65).

 Open the main menu.

   0 +      

Press keys.

 Enter number for the length of the pause (1 = 1 sec.; 2 = 2 sec.; 3 = 3 sec.; 4 = 6 sec.) and press **OK**.

To insert a dialling pause: press and hold  for 2 seconds. A P appears in the display.

Temporarily switching to tone dialling (DTMF)

If your PABX still operates with dial pulsing (DP), but you need tone dialling for a connection (e.g. to listen to the network mailbox) you must switch to tone dialling for the call.

Precondition: You are conducting a call or have already dialled an external number.

 Press the star key.

After the call is ended, dial pulsing is automatically activated again.

Customer Service & Assistance

You have questions? As a Gigaset customer, you can take advantage of our comprehensive service offerings. You can find help quickly in this **User Manual** and in the **service pages of our Gigaset online portal**.

Please register your phone right after purchase on www.gigaset.com/gr/service thus enabling us to provide you even with better service in case of questions or in case of a warranty claim. Your personal user account enables you to directly contact our customer service by email.

In our constantly updated online service on www.gigaset.com/gr/service you can find:

- ◆ Extensive information about our products
- ◆ FAQ compilations
- ◆ Keyword search to help find topics quickly
- ◆ Compatibility database: Find out which base stations and handsets can be combined.
- ◆ Product comparison: Compare the features of several products with each other.
- ◆ Downloads for user manuals and current software updates
- ◆ E-mail contact form to our customer service

Our service representatives are available on the **telephone** for more advanced questions or in-person consultation.

Service Greece 801 1000 500

(0.026 € per minute from the Greek phone network. For calls from mobile phone networks, other prices may apply.)



Please note that if the Gigaset product is not sold by authorised dealers in the national territory the product may not be fully compatible with the national telephone network. It is clearly specified on the box near the CE mark as well as on the bottom of the base station for which country/countries the equipment has been developed. If the equipment is used in a manner inconsistent with this advice or with the instructions of the manual and on the product itself, this may have implications on the conditions for warranty or guarantee claims (repair or exchange of product).


In order to make use of the warranty, the product purchaser is asked to submit a receipt which proves the date of purchase (date from which the warranty period starts) and the type of goods that have been purchased.

Questions and answers

If you have any questions about the use of your phone, you can contact us 24/7 at www.gigaset.com/service.

The table below contains a list of common problems and possible solutions.

<p>The display is blank.</p> <ol style="list-style-type: none"> The handset is not switched on. <ul style="list-style-type: none"> Press and hold the end call key . The battery is flat. <ul style="list-style-type: none"> Charge the battery or replace it (→ page 11).
<p>Not all menu options are displayed.</p> <p>The menu display is reduced (Standard mode).</p> <ul style="list-style-type: none"> Activate extended menu display (Expert mode ) (→ page 25).
<p>No Base flashes on the display.</p> <ol style="list-style-type: none"> The handset is outside the range of the base. <ul style="list-style-type: none"> Move the handset closer to the base. The range of the base is reduced because eco mode is activated. <ul style="list-style-type: none"> Deactivate eco mode (→ page 52) or reduce the distance between the handset and the base. The base is not switched on. <ul style="list-style-type: none"> Check the mains adapter of the base (→ page 9).
<p>Please register handset flashes on the display.</p> <p>Handset has not been registered with the base or has been deregistered.</p> <ul style="list-style-type: none"> Register the handset (→ page 53).
<p>Handset does not ring.</p> <ol style="list-style-type: none"> The ringtone is deactivated. <ul style="list-style-type: none"> Activate the ringtone (→ page 61). Call divert set for "All Calls". <ul style="list-style-type: none"> Deactivate call divert (→ page 31). The telephone only rings when the phone number is transferred. <ul style="list-style-type: none"> Activate the ringtone for anonymous calls (→ page 61).
<p>You cannot hear a ringtone/dialling tone from the fixed line network.</p> <p>The phone cord supplied has not been used or has been replaced by a new cord with the wrong pin connections.</p> <ul style="list-style-type: none"> Please always use the phone cord supplied or ensure that the pin connections are correct when purchasing from a retailer (→ page 9).

<p>Error tone sounds after system PIN prompt.</p> <p>You have entered the wrong system PIN.</p> <ul style="list-style-type: none"> Reset the system PIN to 0000 (→ page 64).
<p>Forgotten the system PIN.</p> <ul style="list-style-type: none"> Reset the system PIN to 0000 (→ page 64).
<p>The other party cannot hear you.</p> <p>You have pressed the mute key . The handset is "muted".</p> <ul style="list-style-type: none"> Activate the microphone again (→ page 30).
<p>The number of the caller is not displayed despite CLIP.</p> <p>Calling Line Identification is not enabled.</p> <ul style="list-style-type: none"> The caller should ask the network provider to enable Calling Line Identification (CLI).
<p>You hear an error tone when keying an input (a descending tone sequence).</p> <p>Action has failed/invalid input.</p> <ul style="list-style-type: none"> Repeat the operation. Watch the display and refer to the user guide if necessary.
<p>You cannot listen to messages on the network mailbox.</p> <p>Your PABX is set for dial pulsing.</p> <ul style="list-style-type: none"> Set your PABX to tone dialling.

Exclusion of liability

Some displays may contain pixels (picture elements), which remain activated or deactivated. As a pixel is made up of three sub-pixels (red, green, blue), it is possible that pixel colours may vary.

This is completely normal and does not indicate an error.

Authorisation

This device is designed for the analogic telephone connection in the Greek telephone net.

Country-specific requirements have been taken into consideration.

Gigaset Communications GmbH hereby declares that the phone described in this user guide is in compliance with the essential requirements and other relevant provisions of European Directive 1999/5/EC (R&TTE).

If you require a copy of the original, visit the **website**:

www.gigaset.com/docs

CE 0682

Guarantee Certificate

Without prejudice to any claim the user (customer) may have in relation to the dealer, the customer shall be granted a manufacturer's Guarantee under the conditions set out below:

- ◆ In the case of new devices and their components exhibiting defects resulting from manufacturing and/or material faults within 24 months of purchase, Gigaset Communications shall, at its own option and free of charge, either replace the device with another device reflecting the current state of the art, or repair the said device. In respect of parts subject to wear and tear (e.g., batteries, keypads, casings), this warranty shall be valid for six months from the date of purchase.
- ◆ This Guarantee shall be invalid if the equipment defect is attributable to improper treatment and/or failure to comply with information contained in the user manuals.
- ◆ This Guarantee shall not extend to services performed by the authorised dealer or the customer themselves (e.g.

installation, configuration, software downloads). User manuals and any software supplied on a separate data medium shall be excluded from the Guarantee.

- ◆ The purchase receipt, together with the date of purchase, shall be required as evidence for invoking the Guarantee. Claims under the Guarantee must be submitted within two months of the Guarantee default becoming evident.
- ◆ Ownership of devices or components replaced by and returned to Gigaset Communications shall vest in Gigaset Communications.
- ◆ This Guarantee shall apply to new devices purchased in the European Union. The Guarantee is issued by Gigaset Communications Austria GmbH, Businesspark Marximum Objekt 2 / 3.Stock, Modecenterstraße 17, 1110 Vienna, Austria.
- ◆ Any claims that differ from or extend beyond these mentioned in this manufacturer's warranty shall be excluded, except from cases expressly specified in the applicable law. (In no event shall Gigaset Communications be liable for any loss of business, profits or data, additional software loaded by the customer or other information. The customer shall also bear the responsibility for the creation of backup copies of their files. The limitation of liability shall not apply if and to the extent liability is mandatory under the applicable law, e.g. according to product liability law or in the event of intentional misconduct, severe negligence, personal injury, damage to parts of the human body or to personal health, or in case of violations of conventional obligations. However, the claims for damages related to violation of conventional obligations shall be limited to predictable damages, representative of such conventions, as long as there is no intention or severe negligence, personal injury, damage to parts of the human

Environment

body or to personal health, according to the product liability law.)

- ◆ The duration of the Guarantee shall not be extended by services rendered under the terms of the Guarantee.
- ◆ Insofar as no Guarantee default exists, Gigaset Communications reserves the right to charge the customer for replacement or repair.
- ◆ The above provisions do not imply a change in the burden of proof to the detriment of the customer.

To invoke this Guarantee, please contact the Gigaset Communications telephone service. The relevant number is to be found in the accompanying user guide.

Environment

Our environmental mission statement

We, Gigaset Communications GmbH, bear social responsibility and are actively committed to a better world. Our ideas, technologies and actions serve people, society and the environment. The aim of our global activity is to secure sustainable life resources for humanity. We are committed to a responsibility for our products that comprises their entire life cycle. The environmental impact of products, including their manufacture, procurement, distribution, use, service and disposal, are already evaluated during product and process design.

Further information on environmentally friendly products and processes is available on the Internet at www.gigaset.com.

Environmental management system



Gigaset Communications GmbH is certified pursuant to the international standards EN 14001 and ISO 9001.

ISO 14001 (Environment): certified since September 2007 by TÜV SÜD Management Service GmbH.

ISO 9001 (Quality): certified since 17/02/1994 by TÜV SÜD Management Service GmbH.

Ecological energy consumption

The use of ECO DECT (→ page 52) saves energy and makes an active contribution towards protecting the environment.

Disposal

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority.

All electrical and electronic equipment must be disposed of separately from general household waste using the sites designated by local authorities.



If a product displays this symbol of a crossed-out rubbish bin, the product is subject to European Directive 2002/96/EC.

The appropriate disposal and separate collection of used equipment serve to prevent potential harm to the environment and to health. They are a precondition for the re-use and recycling of used electrical and electronic equipment.

For further information on disposing of your used equipment, please contact your local authority or your refuse collection service.

Appendix

Care

- ▶ Wipe the base station, charging cradle and handset with a **damp** cloth (do not use solvent) or an antistatic cloth.
- ▶ Impairments in the high-gloss finish can be carefully removed using display polishes for mobile phones.

Never use a dry cloth. This can cause static.

Contact with liquid

If the handset has come into contact with liquid:

1. **Switch off the handset and remove the battery pack immediately.**
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place **for at least 72 hours** (not in a microwave, oven etc.).
4. **Do not switch on the handset again until it is completely dry.**

When it has fully dried out, you will normally be able to use it again.

Specifications

Technology:

Nickel-metal-hydride (NiMH)

Size: AAA (Micro, HR03)

Voltage: 1.2 V

Capacity: 550 - 1000 mAh

We recommend the following battery types, because these are the only ones that guarantee the specified operating times, full functionality and long service life:

- ◆ Yuasa AAA 800 mAh

The device is supplied with two approved batteries.

Handset operating times/charging times

The operating time of your Gigaset depends on the capacity and age of the batteries and the way they are used. (All times are maximum possible times).

	Capacity (mAh) approx.			
	550	700	800	1000
Standby time (hours)*	160/48	185/56	210/64	260/79
Talktime (hours)	10	12	13	17
Operating time for 1.5 hrs of calls per day (hours)**	85	100	115	140
Charging time in base (hours)	7,5	8,5	10	12
Charging time in charging cradle (hours)	6,5	7,5	8,5	10,5

* without/with display backlight

** without display backlight
(Setting the display backlight → page 60)

Due to the constant progression in battery development, the list of recommended batteries in the FAQ section of the Gigaset Customer Care pages is regularly updated:

www.gigaset.com/service

Base power consumption

In standby mode:

approx. 1.1 watt


During the call:

approx. 1.0 watt

General specifications

DECT standard	is supported
GAP standard	is supported
No. of channels	60 duplex channels
Radio frequency range	1880–1900 MHz
Duplex method	Time multiplex, 10 ms frame length
Pulse repetition rate	100 Hz
Pulse transmission length	370 µs
Channel grid	1728 kHz
Bit rate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW, average power per channel 250 mW pulse power
Range	up to 300 m outdoors, up to 50 m indoors
Base power supply	230 V ~/50 Hz
Environmental conditions in operation	+5°C to +45°C, 20% to 75% relative humidity
Dialling mode	DTMF (tone dialling)/ DP (dial pulsing)

Pin connections on the telephone jack



Writing and editing text

The following rules apply when writing text:

- ◆ Each key between **[0 +]** and **[9 wxyz]** is assigned several letters and characters.
- ◆ Control the cursor with **[←]** **[→]** **[↶]** **[↷]**. Press and **hold** **[↶]** or **[↷]** to move the cursor **word by word**.
- ◆ Characters are inserted at the cursor position.
- ◆ Press the star key **[* Δ]** to display the table of special characters. Select the required character and press the display key **[Insert]** to insert the character at the cursor position.
- ◆ Press and **hold** **[0 +]** to **[9 wxyz]** to insert digits.
- ◆ Press **[<C]** display key to delete the **characters** to the left of the cursor. Press and **hold** to delete the **word** to the left of the cursor.
- ◆ The first letter of the name of directory entries is automatically capitalised, followed by lower case letters.

Writing an SMS/names

Press the relevant key several times to enter letters/characters.













If you press and **hold** a key, the corresponding digit is inserted.

Standard characters

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
[1 Δ]	1									
[2 ABC]	a	b	c	2	ä	á	à	â	ã	ç
[3 DEF]	d	e	f	3	ë	é	è	ê		
[4 GHI]	g	h	i	4	ï	í	ì	î		
[5 JKL]	j	k	l	5						
[6 MNO]	m	n	o	6	ö	ñ	ó	ò	ô	õ
[7 PQRS]	p	q	r	s	7	ß				
[8 TUV]	t	u	v	8	ü	ú	ù	û		
[9 WXYZ]	w	x	y	z	9	ÿ	ý	æ	ø	å
[0 +]	[↵] ¹⁾	.	,	?	!	[↶] ²⁾	0			

- 1) Space
2) Line break



Greek

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x	11x	12x
1 	1											
2 	α	β	ά	2	a	b	c					
3 	δ	ε	φ	έ	3	d	e	f				
4 	γ	η	ι	ή	ί	ϊ	ϊ	4	g	h	i	
5 	κ	λ	5	j	k	l						
6 	μ	v	o	ó	ώ	6	m	n	o			
7 	π	ρ	ς	σ	ψ	7	p	q	r	s		
8 	θ	τ	8	t	u	v						
9 	ζ	ξ	υ	χ	ύ	ü	ü	9	w	x	y	z
0 	 ¹⁾	.	,	?	!	 ²⁾	0					

1) Space

2) Line break

Setting upper/lower case or digits

Press the hash key  briefly to switch from "Abc" mode to "123" and from "123" to "abc" and from "abc" to "Abc" (upper case: 1st letter upper case, all others lower case). Press the hash key  before entering the letter.

You can see in the display whether upper case, lower case or digits is selected.

Accessories

Gigaset handsets

Upgrade your Gigaset to a cordless PABX:

Gigaset C610H handset

- ◆ Social life management with room monitor and birthday reminders, One Touch Call mode
- ◆ Individual programming of ringtones with 6 VIP-groups
- ◆ High-quality keypad with illumination
- ◆ 1.8" TFT colour display
- ◆ Directory for up to 150 vCards
- ◆ Talk/standby time of up to 12h/180h, standard batteries
- ◆ Large font for call lists and directory
- ◆ Brilliant sound quality in handsfree mode
- ◆ Time control for external calls
- ◆ Screensaver (digital clock)
- ◆ ECO DECT
- ◆ Alarm clock
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ No interruptions from unknown calls
- ◆ Room monitor (Babyphone), One Touch Call mode
- ◆ SMS with up to 640 characters

www.gigaset.com/gigasetc610h



Gigaset SL400 handset

- ◆ Genuine metal frame and keypad
- ◆ High-quality keypad illumination
- ◆ 1.8" TFT colour display
- ◆ Bluetooth® and mini USB
- ◆ Directory for up to 500 vCards
- ◆ Talk/standby time of up to 14h/230h
- ◆ Large font for call lists and directory
- ◆ Brilliant sound quality in handsfree mode: 4 handsfree settings
- ◆ Caller pictures, slide show and screensaver (analogue and digital clock)
- ◆ Silent alert, download ringtones
- ◆ ECO DECT
- ◆ Alarm clock
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ No interruptions from unknown calls
- ◆ Room monitor (Babyphone), One Touch Call mode
- ◆ SMS with up to 640 characters

www.gigaset.com/gigaset-sl400h



Gigaset S810H handset

- ◆ Brilliant sound quality in handsfree mode
- ◆ High-quality genuine metal keypad with illumination
- ◆ Plus/minus key for simple volume control
- ◆ 1.8" TFT colour display
- ◆ Bluetooth® and mini USB
- ◆ Directory for up to 500 vCards
- ◆ Talk/standby time of up to 13h/180h, standard batteries
- ◆ Large font for call lists and directory
- ◆ Brilliant sound quality in handsfree mode:
4 handsfree settings
- ◆ Caller pictures, screensaver (analogue and digital clock)
- ◆ Download ringtones
- ◆ ECO DECT
- ◆ Alarm clock
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ No interruptions from unknown calls
- ◆ Room monitor (Babyphone), One Touch Call mode
- ◆ SMS with up to 640 characters

www.gigaset.com/gigaset810h



Gigaset SL78H handset

- ◆ Real metal frame
- ◆ Modern keypad with high-quality illumination
- ◆ 2.2" TFT QVGA colour display
- ◆ Bluetooth® and mini USB
- ◆ Directory for up to 500 vCards
- ◆ Talk/standby time of up to 14h/200h
- ◆ Brilliant sound quality in handsfree mode
- ◆ Caller pictures, slide show and screensaver (analogue and digital clock)
- ◆ Download ringtones
- ◆ ECO DECT
- ◆ Alarm clock
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ Room monitor (Babyphone)
- ◆ SMS with up to 640 characters

www.gigaset.com/gigaset78h



Accessories

Gigaset E49H handset

- ◆ Resistant to shocks, dust and water splashes
- ◆ Hardy illuminated keypad
- ◆ Colour display
- ◆ Directory for up to 150 entries
- ◆ Talk/standby time of up to 12h/250h
Standard batteries
- ◆ Brilliant sound quality in handsfree mode
- ◆ Screensaver
- ◆ ECO DECT
- ◆ Alarm clock
- ◆ Room monitor (Babyphone)
- ◆ SMS with up to 640 characters

www.gigaset.com/gigasete49h



L410 handsfree clip for cordless phones

- ◆ Move during a call without any restrictions
- ◆ Handy clip belt
- ◆ Brilliant sound quality in speaker mode
- ◆ Simple to transfer calls from the handset
- ◆ Weight approx. 30 g
- ◆ ECO-DECT
- ◆ Five different volume levels
- ◆ Status indication via LED
- ◆ Talk/standby time of up to 5 h/120 h
- ◆ Range of up to 50 m indoors and up to 300 m outdoors

www.gigaset.com/gigasetl410



Gigaset repeater

The Gigaset repeater can be used to increase the reception range between your Gigaset handset and the base.

www.gigaset.com/gigasetrepeater



Compatibility

For more information on handset functions in relation to Gigaset bases, please visit:

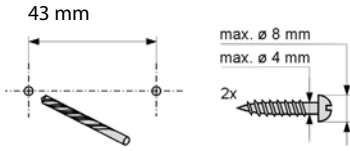
www.gigaset.com/compatibility

All accessories and batteries are available from your phone retailer.

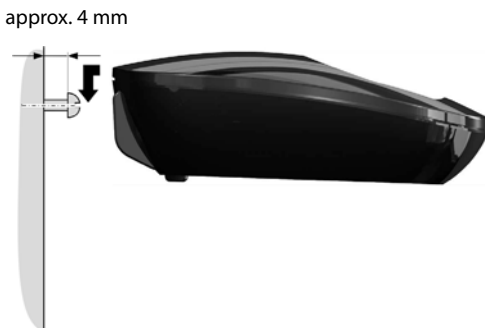



Only use original accessories. This will avoid possible health risks and personal injury, and also ensure that all the relevant regulations are complied with.

Mounting the base on the wall



Mounting the charging cradle on the wall



Index

A

- Access code 65
 - for a PABX 65
- Access protection 63
- Accessories 74
- Acknowledge tones 62
- Activating
 - advisory tones 62
 - handset 22
 - keypad lock 22
 - listening in 56
 - muting ringtone 49
 - network mailbox 33
 - room monitor 57
- Advisory tones 62
- Alarm clock 53
- Alert tone 62
- Anniversary 36
 - deactivating 37
 - missed 40
 - saving in directory 36
- Area code
 - setting own area code 62
- Assigning a number key 58
- Authorisation 69
- Auto answer 28, 60
- Automatic network provider
 - preselection 40

B

- Babyphone 57
- Base
 - changing 54
 - connecting 9
 - connecting to PABX 65
 - restoring to factory settings 64
 - setting up 9
 - settings 63
 - system PIN 63, 64
- Battery
 - charging 1, 2, 13
 - display 1, 2
 - icon 1, 2
 - inserting 11
 - tone 62
- Best base 54
- Birthday, see Anniversary

C

- Call
 - accepting 28
 - connect participant 56
 - diverting (connecting) 55
 - ending 28
 - external 28
 - internal 54
 - transferring (connecting) 56
- Call duration 28
- Call forwarding 31
- Call lists 38
- Call swapping 32
- Call waiting
 - accepting/rejecting 31
 - activating/deactivating 31
 - external call 31
 - internal call 55
- Call-by-call 40
- Calling
 - external 28
 - internal 54
- Calling line display, notes 29
- Calling Line Identification 29
- Cancelling preselection 41
- Care of the telephone 71
- CD, see Call divert
- Changing
 - dialling mode 65
 - display language 14, 59
 - earpiece volume 60
 - internal number of a handset 56
 - name of a handset 56
 - pauses 66
 - ringtone 61
 - speaker volume 60
 - system PIN 63, 64
- Character set 43, 45, 72
- Charge status display 1, 2
- CLI, CLIP 29
- CNIP 29
- Colour scheme 60
- Conference 32
- Conference (internal) 55
- Confirmation tone 62
- Connecting the headset 17
- Connecting, base to PABX 65
- Consultation call 32
- Consultation call (internal) 55

- Control key 1, 19
- Correcting incorrect entries 20
- Customer Care 67
- Customer Service & Assistance 67
- D**
- Deactivate anonymous calls 61
- Deactivating
 - advisory tones 62
 - handset 22
 - keypad lock 22
 - listening in 56
 - muting ringtone 49
 - network mailbox 33
 - room monitor 58
- Delete key 20
- Deleting
 - characters 20
- Deregistering (handset) 54
- Destination number (room monitor) 57
- Dial pulsing 65
- Dialling
 - directory 35
 - mode 65
 - pause 66
 - using quick dial 36, 58
- Directory 34
 - copying number from text 36
 - managing entries 35
 - opening 19
 - order of entries 35
 - saving anniversary 36
 - saving entry 34
 - saving the sender's number
 - (SMS) 45
 - sending entry/list to handset 36
 - using to enter numbers 36
- Display
 - changing display language 14, 59
 - colour scheme 60
 - in idle status 17, 21
 - lighting 60
 - memory directory 36
 - missed anniversaries 40
 - name (CNIP) 29
 - network mailbox message 51
 - number (CLI/CLIP) 29
 - screensaver 59
 - setting 59
 - symbols 2
- Display keys 1, 20
 - assigning 58
- Disposal 70
- DP (dial pulsing) 65
- Draft message list (SMS) 43
- E**
- Earpiece volume 60
- ECO DECT 52
- Eco Mode 52
- Eco Mode+ 52
- Editing
 - destination number
 - (room monitor) 58
- E-mail address 44
 - copying from the directory 36
- End call key 1, 28
- Ending, call 28
- Entry
 - saving (network mailbox) 51
 - saving, changing (preselection) 41
 - selecting from directory 35
- Environment 70
- Error tone 62
- Expert mode 25, 68
- External call
 - call waiting 31
- F**
- Fast access
 - network mailbox 51
- Fax (SMS) 44
- Flashing of the message key
 - disable/enable 39
- G**
- General troubleshooting 68
- Group call 54
- Guarantee Certificate 69
- H**
- Handset
 - activating/deactivating 22
 - advisory tones 62
 - changing internal number 56
 - changing name 56
 - changing the number 56
 - changing to a different base 54
 - changing to best reception 54
 - colour scheme 60

Index

contact with liquid 71
de-registering 53, 54
display language 14, 59
display lighting 60
diverting a call 55
earpiece volume 60
idle status 21
large font 60
list 19
locating 54
muting 30
paging 54
registering 53
registering to a different base 54
restoring to factory settings 63
screensaver 59
set up for use 11
setting 58
speaker volume 60
using room monitor 57
using several 53
Handset mode 30
Handset operating time
 in room monitor mode 57
Handsfree key 1
Handsfree mode 30
Hash key 1, 22
Headset socket 17
Hearing aids 6
Help 68

I

Icon
 alarm clock 53
 for new messages 38
 keypad lock 22
 new SMS 44
 ringtone 61

Icons
 display 2
Idle status (display) 17, 21
Idle status, returning to 21
Incoming message list (SMS) 44
Incorrect input (correction) 20
Installing, base 9

Internal
 conference 55
 consulting 55

 listening in 56
 making calls 54
Internal call 54
 call waiting 55

K

Key

 assign function or number 58
Key 1 (fast access) 1
Keypad lock 22

Keys
 control key 1, 19
 delete key 20
 display keys 1, 20
 end call key 1, 28
 fast access 1
 handsfree key 1
 hash key 1, 22
 message key 1
 mute key 1
 On/Off key 1
 quick dial 36
 recall key 1
 star key 1
 talk key 1, 28

L

Language, display 14, 59
Large font 60
Linking, see SMS
Liquid 71

List
 call lists 38
 handsets 19
 missed calls 38
 network mailbox 38
 SMS draft message list 43
 SMS incoming message list 44
 SMS list 38

Listening in to a call 56
Locating, handset 54

Lock
 activating/deactivating keypad lock .. 22

M

Mailbox ID, see SMS
Mailboxes, see SMS
Mains adapter 6

- Making calls
 - accepting a call 28
 - cost-effective calls 40
 - external 28
 - internal 54
- Manual redial 37
- Medical equipment 6
- Memory, directory 36
- Menu
 - end tone 62
 - opening 19
 - overview 25
 - prompting 21
- Menu display
 - Expert mode 25, 68
 - Standard mode 25, 68
- Message key
 - disable/enable flashing 39
 - open list 44
 - opening lists 38
- Messages
 - key 1
- Microphone 1
- Missed calls 38
- Music on hold 63
- Mute key 1
- Muting
 - first ring 49
 - handset 30
- N**
- Name
 - displaying caller's name (CNIP) 29
 - of a handset 56
- Network mailbox 51
- Network provider preselection,
 - automatic 40
- Network services 31
- Night mode see Time Control
- Notification by SMS 46
- Number
 - as destination for room monitor 57
 - copying from an SMS text 45
 - copying from directory 36
 - copying to directory 36
 - displaying caller's number (CLIP) 29
 - entering network mailbox number ... 51
 - entering with directory 36
 - fixed destination call 33
 - saving in the directory 34
- O**
- On/Off key 1
- One Touch Call 28
- Order in directory 35
- P**
- PABX
 - connecting base 65
 - pauses 66
 - saving access code 65
 - setting dialling mode 65
 - setting recall 65
 - SMS 49
 - switching to tone dialling 66
- Pack contents 8
- Paging 54
- Paging key 1
- Pause
 - after access code 66
 - after line seizure 66
 - after recall key 66
- PIN change
 - system PIN 64
- Pin connections 72
- Power consumption 71
- Preselection 40
 - cancelling 41
- Protecting the phone against
 - access 63
- Q**
- Questions and answers 68
- R**
- Range 9
- Recall 65
- Recall key 1, 66
- Reception booster, see Repeater
- Redial 37
- Redirect, see Call divert
- Registering (handset) 53
- Registration key 1
- Reminder call 37
- Repeater 63
- Ring delay 60
- Ringtone
 - changing 61
 - muting 49
 - setting volume 61
- Room monitor 57

Index

- S**
- Saving (access code)..... 65
 - Screensaver..... 59
 - Searching in directory 35
 - Sending
 - directory entry to handset 36
 - Sensitivity (room monitor) 57
 - Setting
 - date 15, 27
 - time 15, 27
 - Setting up
 - handset 11
 - Signal tone, see Advisory tones
 - SMS..... 42
 - active send service centre..... 48
 - changing mailbox..... 47
 - deleting 43, 45
 - diverting 45
 - draft message list 43
 - incoming message list..... 44
 - info services 49
 - linked 42
 - list 38
 - mailbox ID..... 47
 - mailboxes 47
 - notification by SMS..... 46
 - PIN protection 47
 - reading 43, 45
 - receiving 44
 - replying to or diverting 45
 - saving number..... 45
 - self help with error messages 50
 - sending as a fax..... 44
 - sending to a personal mailbox 47
 - sending to an e-mail address..... 44
 - SMS to PABXs 49
 - status report..... 43
 - troubleshooting 50
 - vCard 46
 - writing 42, 72
 - SMS centre
 - changing number..... 48
 - setting 48
 - Snooze mode..... 53
 - Sound, see Ringtone
 - Special functions..... 65
 - Specifications..... 71
 - Speed dial 34, 58
 - Standard mode 25, 68
 - Star key 1
 - System settings 63
- T**
- Talk key 1, 28
 - Telephone jack, pin connections..... 72
 - Text message, see SMS
 - Three-party conference..... 32
 - Time Control (Night mode)..... 61
 - Tone dialling..... 65, 66
 - Troubleshooting (SMS) 50
 - Two Way Talk (room monitor) 57
- V**
- vCard (SMS)..... 46
 - Viewing the network mailbox
 - message 51
 - VIP group (Directory entry)..... 34, 36
 - Volume
 - earpiece..... 60
 - handset speaker volume..... 60
 - loudspeaker 60
 - ringtone 61
- W**
- Warning tone, see Advisory tones
 - Writing (SMS) 42
 - Writing and editing text 72

Issued by

Gigaset Communications GmbH
Frankenstr. 2a, D-46395 Bocholt

© Gigaset Communications GmbH 2011

All rights reserved. Subject to availability.

Rights of modification reserved.

www.gigaset.com

This user guide is made from 100% recycled paper.



A31008-M2305-T101-1-8U19